Network Models for Power Grids: A Generative Approach

Deepjyoti Deka and Sriram Vishwanath

arXiv:1204.0165v1 [cs.SI] 1 Apr 2012

Abstract

The inherent structure of the electrical network has a significant impact on its functioning and health. As power grids move towards becoming 'smarter' with increased demand response and decentralized control, the topological aspects of the grid have become even more important. Understanding the topology can thus lead to better strategies to control the smart grid as well as enable rapid identification and prevention of risks such as blackouts. This paper focuses on modeling and analyzing basic similarities in network structure of large power grids across America and Europe. It studies the topological characteristics of power grids and develops a generative model for them. Based on the typical small world characteristics, large scale test power systems can be developed to better study the working of new algorithms for smart grids.

I. INTRODUCTION

The modern-day electric/power grid is a large complex interactive system that affects the every-day activities of millions of people; serving all the other sectors of the economy. The emergence of a 'smart' grid has added further complexity to the system by bringing in new ideas of demand response, real-time pricing and flexible demand leading to increased control in the hands of end consumers. This, in turn, can lead to reduced pricing and more careful supervision of the grid to preempt/detect failures like cascading blackouts and intentional attacks. Studies on the performance of new technologies for implementation on the grid focus primarily on the test bus systems of different sizes, such as the IEEE 14-bus, IEEE 30-bus, IEEE 57-bus and

---

Deepjyoti Deka and Sriram Vishwanath are at Lab. of Informatics, Networks Communications, Department of Electrical and Computer Engineering, University of Texas at Austin. This work is supported by the Defense Threat Reduction Agency (DTRA) through grant # HDTRA1-09-1-0048-P00003

IEEE 118-bus systems. These bus systems and their data can be found at [14]. However, for an improved understanding of the impact of new technologies for smart grids, test cases should be of the same scale as the large network of buses in the grid and should follow the general trends of the topology present in such massive networks.

Existing analysis has revealed the connection between the working and robustness of the grid to its topological characteristics. Albert et al. [1] and others [2] have established the importance of understanding the physical network that describes the topological structure of the power grid (as represented by the adjacency matrix and/or the network's degree distribution) in determining the vulnerability of the grid to random or directed attacks. Similar work can also be found for other networks, including social networks [4], the Internet [3] and population models for spread of diseases [9] and effective vaccination [10]. In this context, Watts and Strogatz [11] first modeled the power grid's physical-network statistically as having 'small-world' behavior and measured features of the connectivity graph, such as characteristic path length, clustering and average degree. Despite the fact that the power grids possess obvious 'small world' characteristics, it emerges that there is some variation within them compared to other types of networks (such as online social networks).

In particular, there have been several papers on the degree distribution of the underlying physical network associated with large power grids. Though there has been some work reporting power-law/scale free distributions, a considerable body of work reports an exponential degree distribution or, in the least, an exponential tail. [12] reports the presence of exponential degree distribution while considering power plants, substations, and 115 - 765 kV power lines of the North American power grid. The exponential degree distribution is also observed for the western power grid as reported in [13]. Hines et al. in [15] also suggests an exponential degree distribution in The Eastern, Western and Texas Interconnects and reject the power-law degree distribution for these grids as well as for the 300 bus IEEE test case. A very clear exponential tail distribution has also been reported by [16] for the NYISO. Similarly, [7], [6], [8] have mentioned the exponential degree distribution of the power grids of Europe - namely in Italy, UK, Ireland, Portugal as well as for the entire connected component of Europe obtained from the Union for the Co-ordination of Transmission Electricity, UCTE. Although power grids in different countries possess different average degree per node due to their different geographical terrain and shape, an exponential degree distribution seems widespread across regions and large grids. Even though the distribution has been reported to be exponential in existing literature, a generative model motivated by physical characteristics that sheds light on the structure of power grids in general, and its exponential distribution in particular, is yet absent. Such generative models play a critical role in enabling the development of an analytical framework for power grids, similar to the role played by generative models for social and biological networks.

Our paper is dedicated to providing a comprehensive and meaningful generative framework for understanding the physical network associated with power grids. Our approach differs from others in that we look at the physical network evolution as a generative process and present a model that aims to explain the exponential degree distribution for the power network. We present a model (in the mean-field sense) that attempts to capture the distribution and the intuition underlying such a model.

The main results of this paper are as follows:

- We use a spatial Poisson point process to develop an understanding of the creation of buses for the physical network corresponding to power grids and look at its evolution over time. We argue that the resulting degree distribution generated is a natural fit to an exponential distribution.
- We also present a mean-field based analysis for the model and present a mathematical as well as intuitive analysis of the model.
- We verify that the diameter of the resulting network matches that of real-world power grids through numerical examples.

This work connects naturally with two important research issues connected with power grids: a. communication over grids; and b. analysis of the vulnerability of a power grid. Once a simple but universal generative model for power grids is understood, it can be used as a basis to understand mechanisms for effective communication over grids, as well as to uncover the main sources of vulnerability within the grid.

The diameter of a graph is a measure of the longest route between any two nodes in the graph and its scaling with respect to the number of nodes in the network thus represents the time needed for the flow of information over the network. The presence or absence of small-world behavior in a power network indicates the existence of hubs (nodes/buses with high degree) which directly influences the probability of cascading failures in the network given directed/random attacks on the network. Characterizing the diameter and small-world behavior of graphs can play a key role in determining mechanisms that render it resilient to passive failures or active attacks.

The rest of this paper is organized as follows. The next section presents a description of the generative model for the degree distribution of large power networks. The degree distribution is analyzed and numerical results are provided in Section III. The diameter calculations of our model for different sizes of the power network are discussed in Section IV. Results, effects and future topics of study are presented in Section V.

II. GENERATIVE MODEL FOR EXPONENTIAL DEGREE DISTRIBUTION

As discussed in the introduction, large power grids are often found to possess an exponential degree distribution. Now, we present a generative model based on the framework of 2-D spatial Poisson point process theory. We assume that nodes/buses are randomly placed in space according to a Poisson point process P_λ with density λ. However, unlike a majority of existing literature on random geometric graphs where all nodes are assumed to be already present, our goal is to obtain a generative model that reflects the key characteristics of the power grid. In other words, we assume that edges/links between nodes are formed as and when new nodes enter the system (join the power grid). In our model, every new node in the system connects to K of its nearest neighbors (preexisting nodes in the network) where K is a random variable following a given distribution. We first consider K to be a constant (k) and show that the analysis extends to cases where K is a random variable. Note that K affects the average degree of the network. Thus, unlike a random geometric model, longer edges in our generative model are more likely to occur in the early phases due to the restriction of edge formation with only existing nodes in the graph which can be born quite far apart in the geographical area. The nodes numbering 1 to N (the size of the network) are generated according to the aforementioned Poisson point process. This can be justified based on the fact that real power networks have evolved over time and increased in size to their current state. In other words, not all buses are formed at the same time. Thus, links are formed when new nodes/buses are established over a given geographical area (the creation of new nodes can be modeled by a random process) and they connect new nodes to the existing buses in the network. The final state of the network may have 2 nodes A and B quite close together but there may be a link from A to another node C instead of B despite A being further away from C than from B. This can happen if A and C were formed quite early and within a small time interval of each other and B was formed much later in the generation process.

The formation of K connections for each new node in the network can be seen as inducing a measure of reliability within the grid. Meanwhile, the selection of ‘nearest neighbors’ instead of ’random nodes’ can be explained in terms of minimizing the cost of interconnects involved in these connections. Thus, in our generative model, each new node forms K-redundant minimum cost connections into the existing network. Note that this is one of the more natural explanations for the organic evolution of power grids across the globe. Next, we find that such a simple explanation is indeed reasonable, as it leads to an appropriate exponential distribution model for the resulting physical network.

III. MEAN FIELD ANALYSIS OF THE EXPONENTIAL DEGREE DISTRIBUTION

The generative model for the power network assumes creation/ birth of a new node at every time step and formation of K new links from the new node to its K closest neighbors. Thus after N time steps, we have a N bus system. We begin with a given circular area R of known radius r and generate points according to a Poisson point process of density λ. If K were a constant, then we form a complete network with the first $K+1$ nodes. At every time- step $t > K+1$, the probability of a new node joining a previously present node A present in the area depends on the region of influence of the node A where ’region of influence’ refers to the area R_{At} within R such that for every point p within R_{At}, node A is amongst the K nearest neighbors of p at time t. We also assume the absence of two or more links between the same two nodes. Thus, the evolution of the model and the degree distribution follow from the evolution of a higher order K Voronoi-region defined by the Poisson point process of density λ over R. In particular if K is a constant at 1, the process reduces to formation of links to the nearest neighbor and thus follows the basic Voronoi-region evolution of a 2-D Poisson point process. Such a Voronoi-region for a 20 point system is shown in Figure 1. The dots represent the nodes which already exist and probability of formation of a edge to a particular node is directly proportional to the area in its Voronoi-region.

Such processes are non-trivial to analyze and closed form results are not available for higher order Voronoi-regions. Therefore, we begin by using a mean-field framework for analyzing the degree distribution. The main principle behind a mean-field formulation is to replace the dynamics of a single point, bus or node with the average dynamics of the entire system at every time step.

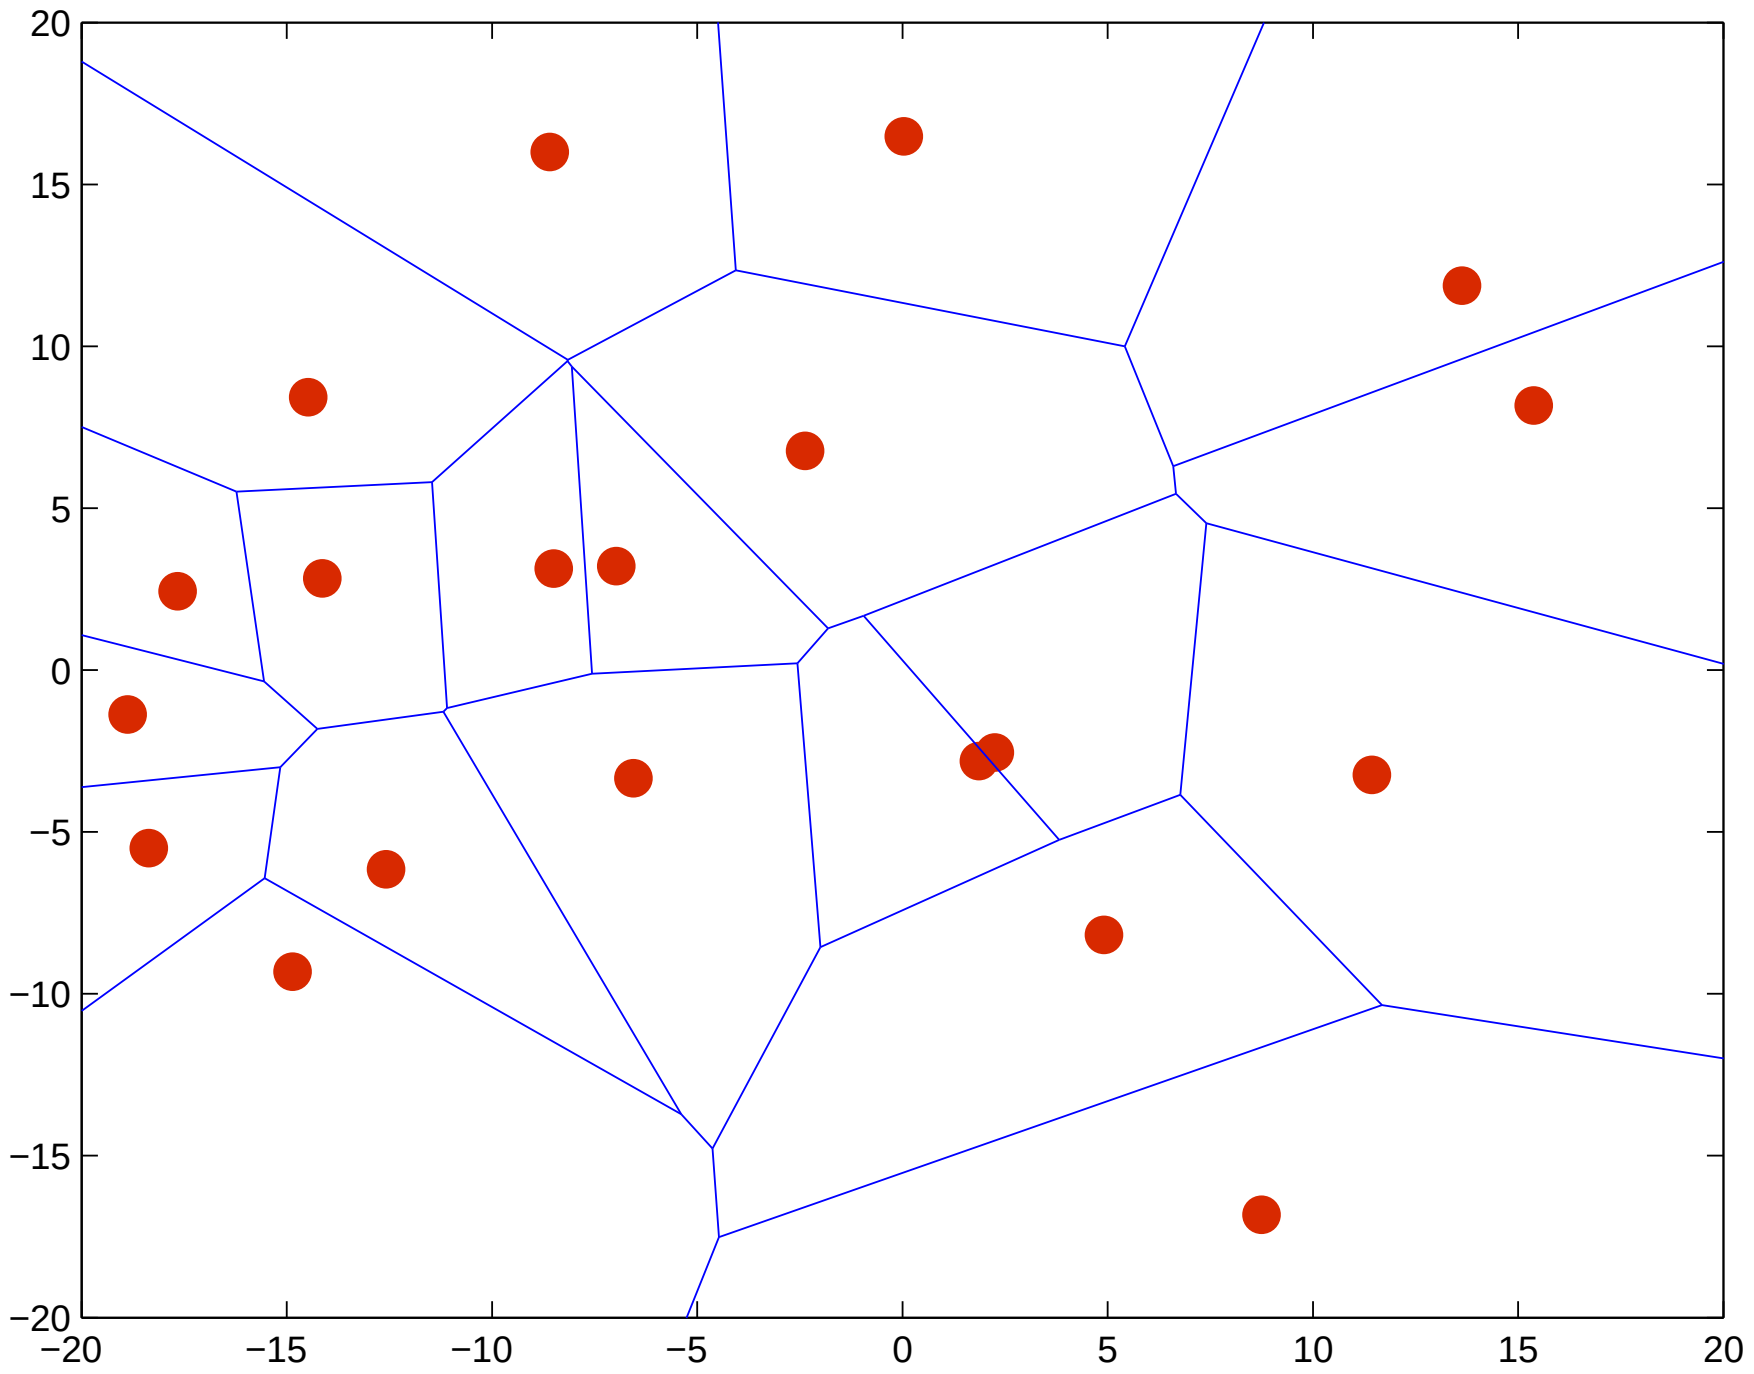

Fig. 1. Voronoi-region formation for a 20 point system with single link formation per node

A good reference for mean-field techniques for analysis in the domain of network sciences can be found in [18]. By using a continuous time approximation of the system, for every time step t, using a mean-field framework, we can view the dynamics of an existing node i as follows: Let $d_i(t)$ be the degree of node i at time t.

Let $v_{it}, P(v_{it})$ be the volume of region of influence of i and its probability. Let K be a constant value at k.

$$\begin{aligned}\frac{d\{d_i(t)\}}{dt} &= P(i \text{ is among the } k\text{-nearest neighbors of node } t \text{ at time } t) \\ &= \sum v_{it} P(v_{it}) \\ &\propto E(v_{it}) = \ E(v_t) \end{aligned} \tag{1}$$

At every time t, the expected value of the volume of the k^{th} order Voronoi-region for t nodes depends only on their positions (which are random) and not on the order in which the nodes entered the network. Since at every time 't', k links are formed,

$$\begin{aligned} \sum_{i}^{t} \frac{d\{d_i(t)\}}{dt} &= k \\ \Rightarrow \ \frac{d\{d_i(t)\}}{dt} &= k/t \\ \Rightarrow \ d_i(t) - k &= k \log(t/i) \\ \Rightarrow \ d_i(t) &= k(1 + \log(t/i)) \end{aligned} \tag{2}$$

Thus, $d_i(t)$ decreases with i. So to get the CDF of the degree distribution $d(t)$, we use:

$$\begin{aligned} &\text{for some degree } d,\ d_i(t) \leq d \\ &\Rightarrow \ k(1 + \log(t/i)) \leq d \\ &\Rightarrow \ \log(t/i) \leq d/k - 1 \\ &\Rightarrow \ i \geq te^{-\frac{d-k}{k}} \\ &\Rightarrow \ P(d(t) \leq d) = (t - i)/t \\ &\Rightarrow \ P(d(t) \leq d) = 1 - e^{-\frac{d-k}{k}} \end{aligned} \tag{3}$$

Thus, we get an exponential degree distribution with density $\lambda = k$. For a different density including non-integral values, we can assume that K is no longer constant but a random variable, such that with probability α, k_1 neighbors are induced; and with probability $1-\alpha$, k_2 neighbors are induced in the graph. For such cases, the density λ is $\alpha k_1 + (1-\alpha)k_2$.

Exact Analysis and Proof of Validity: The previous mean field-analysis depends on a continuous-time approximation of the generative process. We can look at the process in discrete steps as well. Let $N(m,t)$ represent the average number of nodes of degree m at time t with $K = k$ (constant) being the number of new links formed at each step. Now at time $t+1$, the average number of nodes of each degree m increases if the new node coming in at time $t+1$ forms links with nodes of degree $m-1$; and decreases if links are formed with existing nodes of degree m. The probability of the average number of nodes of a particular degree m increasing at a time step thus depends on the number of nodes of degree $m-1$ at the previous time step. Mathematically,

$$N(m,t+1)-N(m,t)=\frac{N(m-1,t)k}{t}-\frac{N(m,t)k}{t}+\delta(m=k) \tag{4}$$

For $m=k$, we have

$$N(k,t+1)-N(k,t)=\frac{N(k,t)k}{t}+1 \tag{5}$$

For large t, using Lemma 4.1.1. in [19], this becomes

$$\frac{N(k,t)}{t}=\frac{1}{1+k} \tag{6}$$

For $m\neq k$,

$$N(m,t+1)=N(m,t)(1-\frac{k}{t})+\frac{N(m-1,t)k}{t} \tag{7}$$

For large t, again using Lemma 4.1.2 in [19], we obtain

$$\begin{aligned}\frac{N(m,t)}{t}&=\frac{\lim_{t\to\infty}\frac{N(m-1,t)}{t}k}{1+k}\\ \Rightarrow\ \frac{N(m,t)}{t}&=(\frac{k}{1+k})^{(m-k)}\frac{1}{1+k}\end{aligned} \tag{8}$$

So , average fraction of nodes $n(d)$ with degree less than d can be obtained from

$$\begin{aligned}n(d)&=\frac{1}{1+k}+\frac{1}{1+k}\frac{k}{1+k}+\frac{1}{1+k}(\frac{k}{1+k})^2+...+\frac{1}{1+k}(\frac{k}{1+k})^{(d-k)}\\ \Rightarrow\ n(d)&=1-(\frac{k}{1+k})^{(d-k)}\\ \Rightarrow\ n(d)&=1-(\frac{1+k}{k})^{(k-d)}\\ \Rightarrow\ n(d)&=1-((1+\frac{1}{k})^{k})^{-\frac{d-k}{k}}\\ \Rightarrow\ n(d)&=1-e^{-\frac{d-k}{k}}\end{aligned} \tag{9}$$

The validity of using a mean-field model of average degree distribution to represent an actual degree distribution can be established using the Azuma-Hoeffding's inequality [19]. Here, we take the number of nodes of a given degree m at time t, i.e, $Z(m,t)$ as a random variable and the location of the incoming nodes y_1, y_2 etc. as the variables influencing the random variable $Z(m,t)$. We obtain a martingale $Z_i(m,t)$ by

$$Z_i(m,t) = E(Z(m,t)|y_1, y_2..., y_i) \tag{10}$$

where $N(m,t) = Z_0(k,t)$ and $Z(m,t) = Z_t(m,t)$.

We have $|Z_i(m,t) - Z_{i-1}(m,t)| \leq 2k$ as number of nodes of a particular degree cannot change by more than $2k$ at each time step. Thus, using the Azuma-Hoeffding inequality, we have

$$P(Z(m,t) - N(m,t) \geq x) \leq e^{-\frac{x^2}{8k^2 t}} \Rightarrow \qquad P(Z(m,t) - N(m,t) \geq x) \rightarrow 0 \text{ as } t \rightarrow 0$$

This proves the validity of the mean field analysis.

A. Exponential Fit of the Generation Model

We show the validity of the mean value analysis for the generation model by fitting the degree distribution achieved from the generation model for different densities with exponential distributions as shown in Figures 2, 3 and 4. We consider Poisson point process over the specified area and simulate positions randomly several times (500 iterations each) and then average our findings to plot the degree distribution. In Figure 2, we show the degree distribution for 2 different values of $K = k$ and λ respectively. It can be seen that changing λ increases only the number of nodes formed and doesn't change the slope of the graph which depends on the fixed value of k alone. In Figure 3, we again keep K fixed and fit exponentials to match the plot of the p.d.f.s. The variable K case is shown in Figure 4 where K takes values from a distribution over 3 values $(3, 4$ and $5)$. Here, we illustrate the exponential nature of the p.d.f.s by fitting exponential distributions to them.

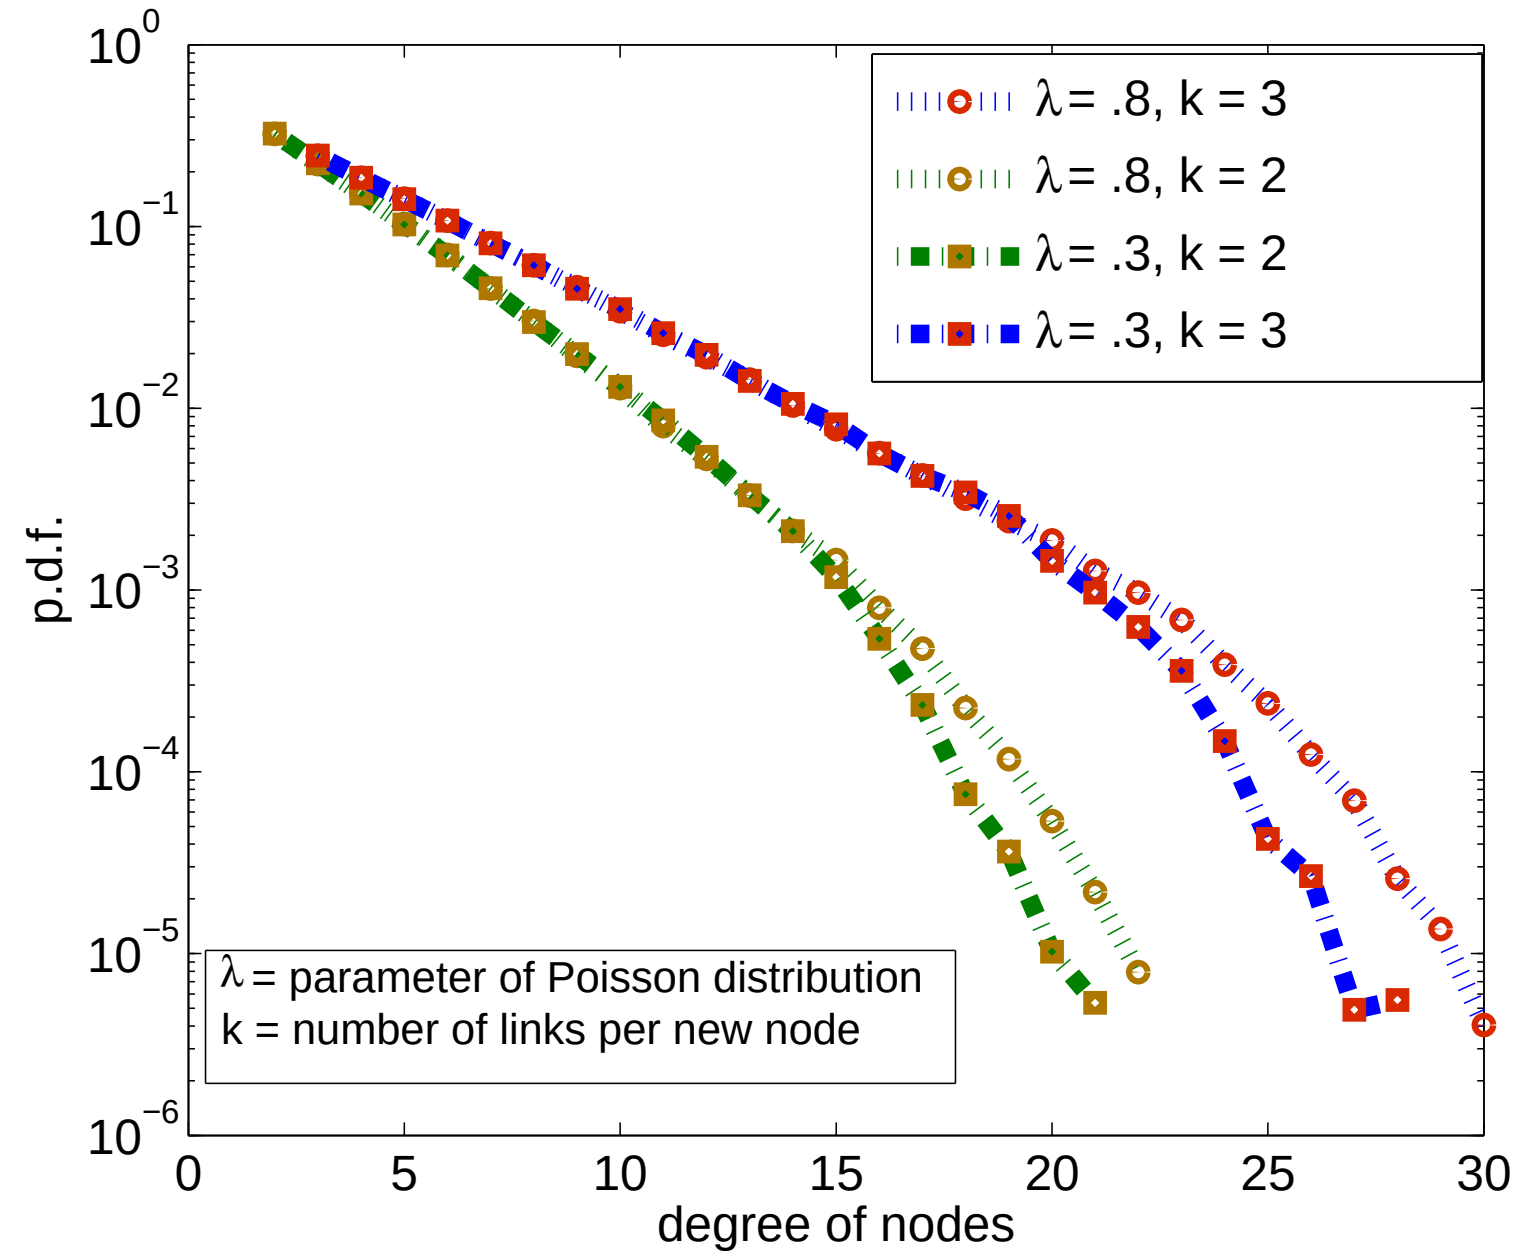

Fig. 2. Degree distribution for Poisson generated nodes for fixed K in radius 20

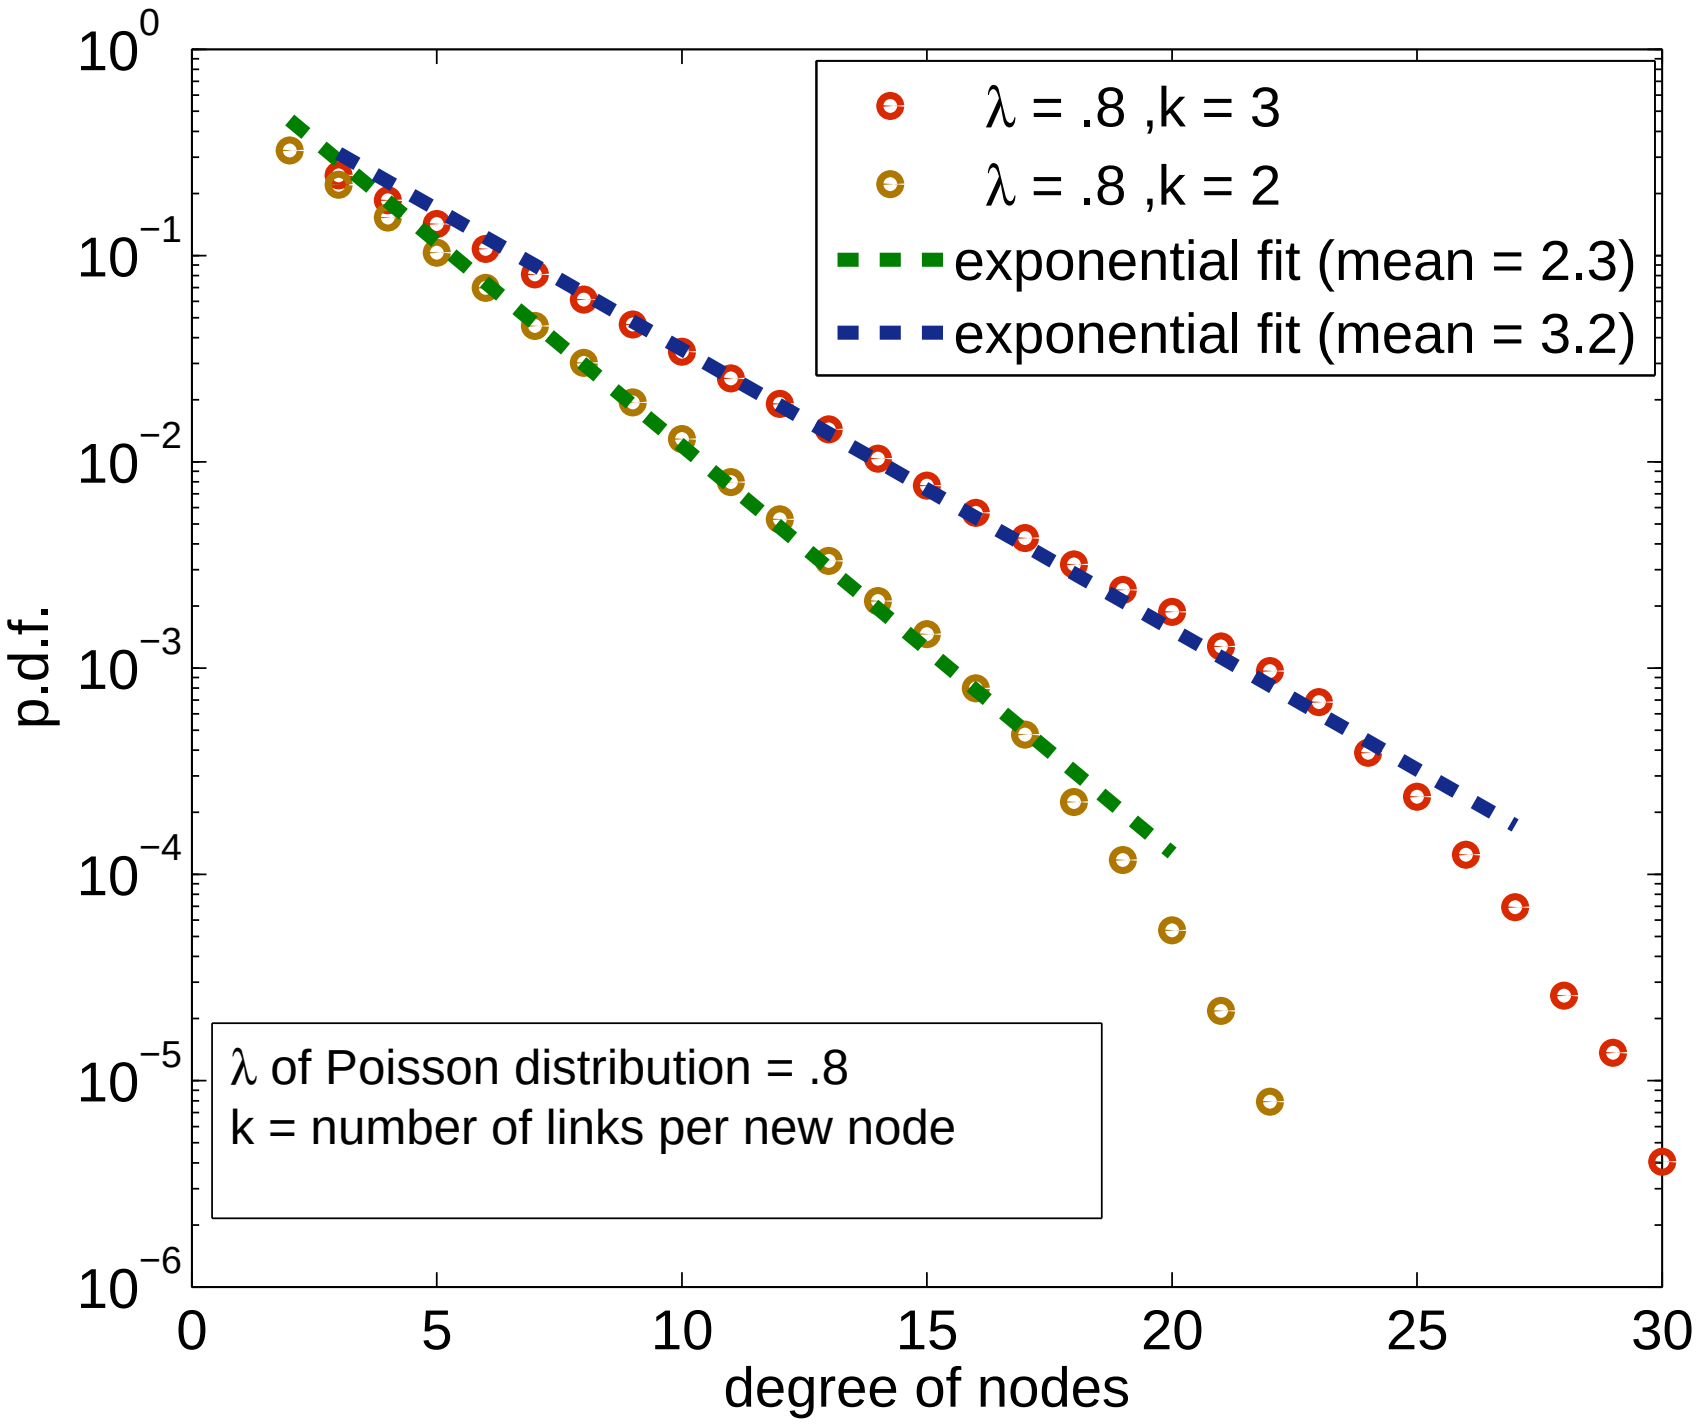

Fig. 3. Fitting exponential p.d.f. to the degree distribution for fixed K in radius 20

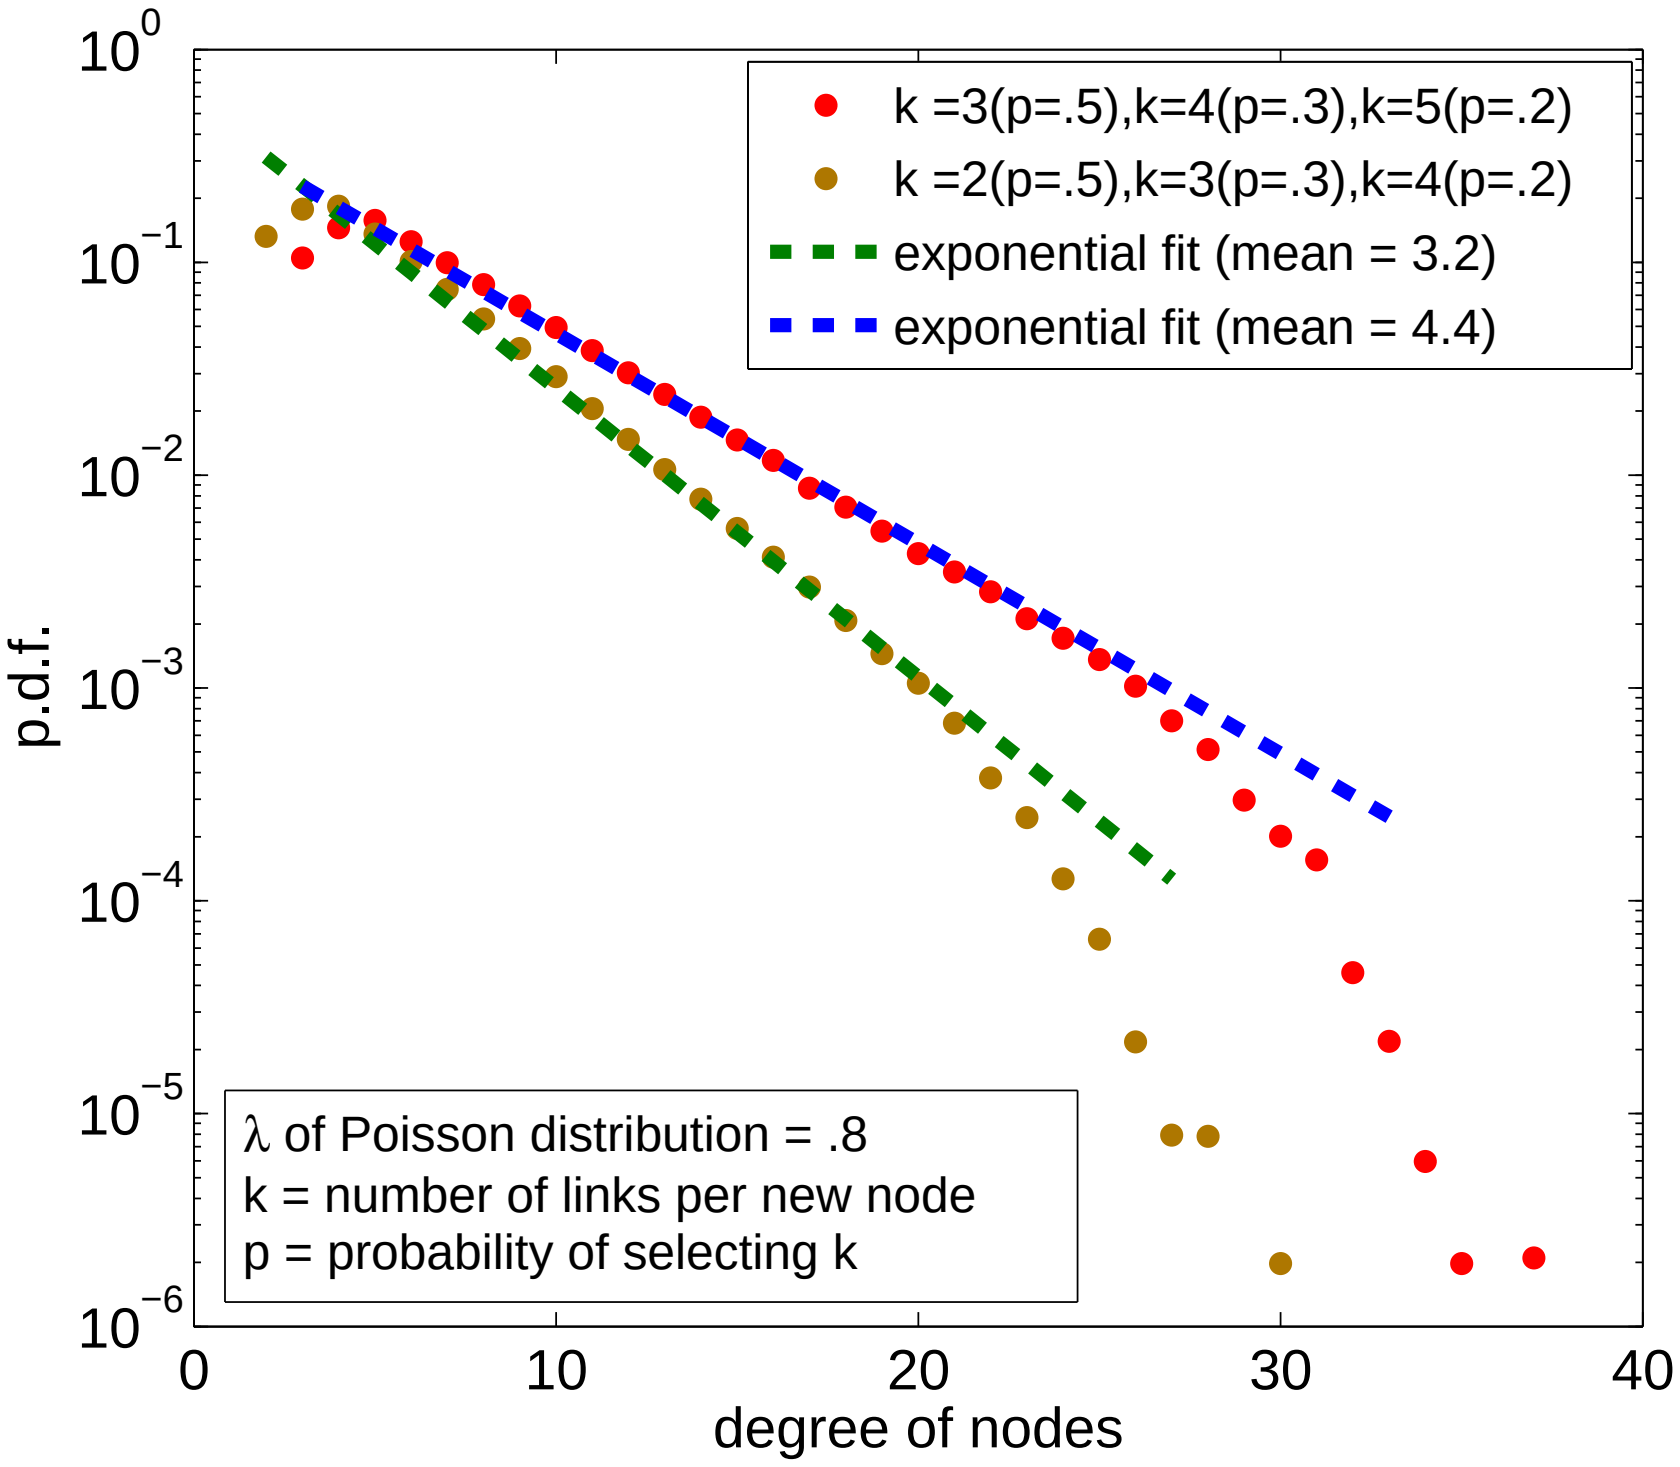

Fig. 4. Fitting exponential p.d.f. to the degree distribution for variable K in radius 20

Though exponential fitting of the p.d.f.s of the degree distribution of the generative model accurately models the first order behavior, we still see the tails of the degree distribution decaying faster than at an exponential rate. To better represent this in a fitting model, we use p.d.f.s from the exponential family of random variables to fit the data next.

B. *Exponential Family Fit of the Generation Model*

Exponential families cover a large group of probability distributions which encompass commonly used ones like Gaussian, exponential, binomial, gamma, Weibull, Poisson distributions. They have the unique property of having the maximum entropy given constraints on expected values (mean, variance etc.). Working with the degree distribution of the nodes in the power grid graph, we need the average degree of the fitting p.d.f. to match the empirical average degree. We begin with a combination of exponential and gamma distributions to fit the empirical p.d.f. We use the software package CVX [17] to optimize for the combination of the considered distributions to get the best fit. We first threshold the maximum degree of a node to one less than the value for which the complimentary cumulative distribution function (CCDF) of the degree distribution falls below 10^{-10}. Higher degrees are thus ignored as they contribute negligibly to the CCDF and the corresponding p.d.f. We then fit the p.d.f. up to this maximum degree using CVX by minimizing the L-2 norm of the difference between the empirical and the fitted p.d.f. In Figures 5 and 6, we show the p.d.f. obtained for fixed and random values of K (number of edges formed by an incoming node) respectively. The performance of the fits are better seen in the linear scale as shown in Figures 7 and 8.

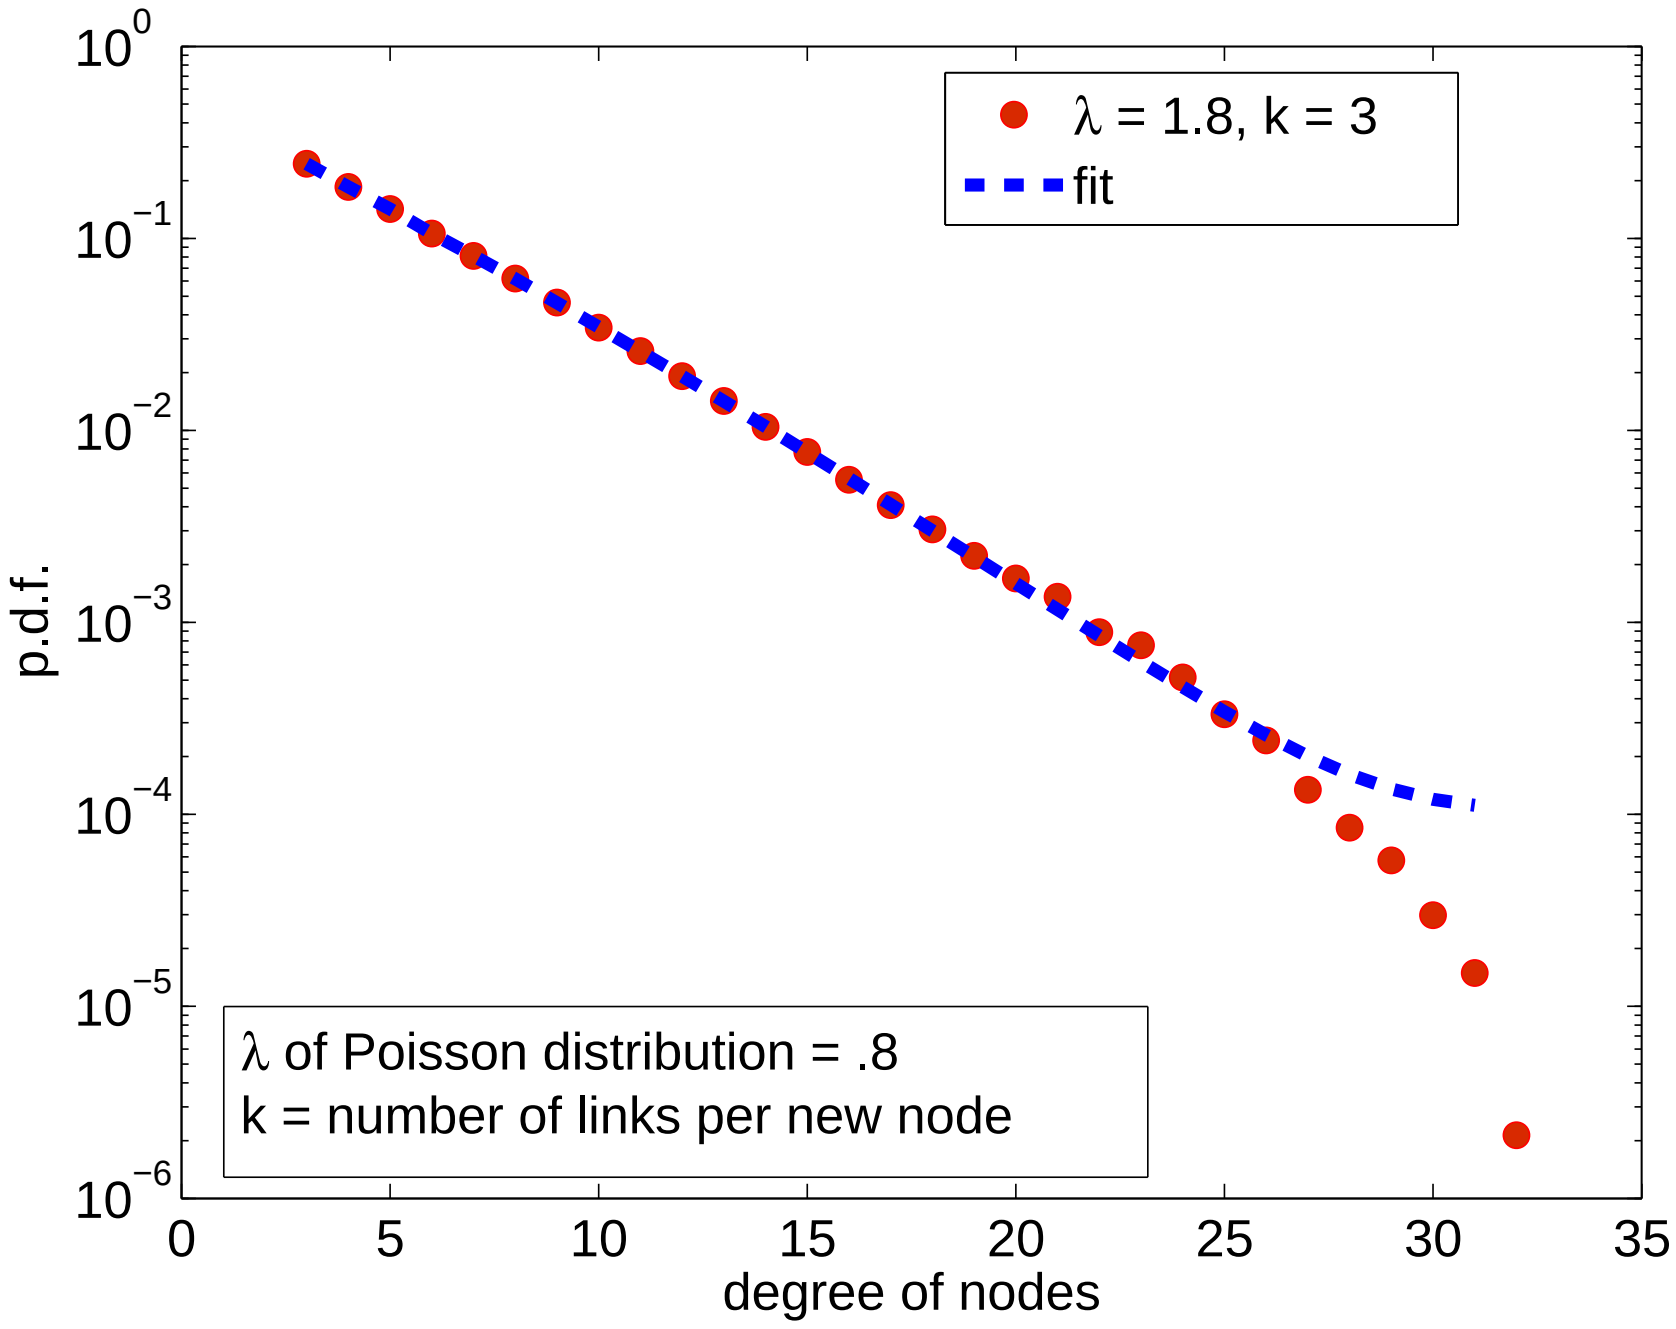

Fig. 5. Fitting a combination of exponential and gamma p.d.f.s to the degree distribution in radius 20 for fixed K

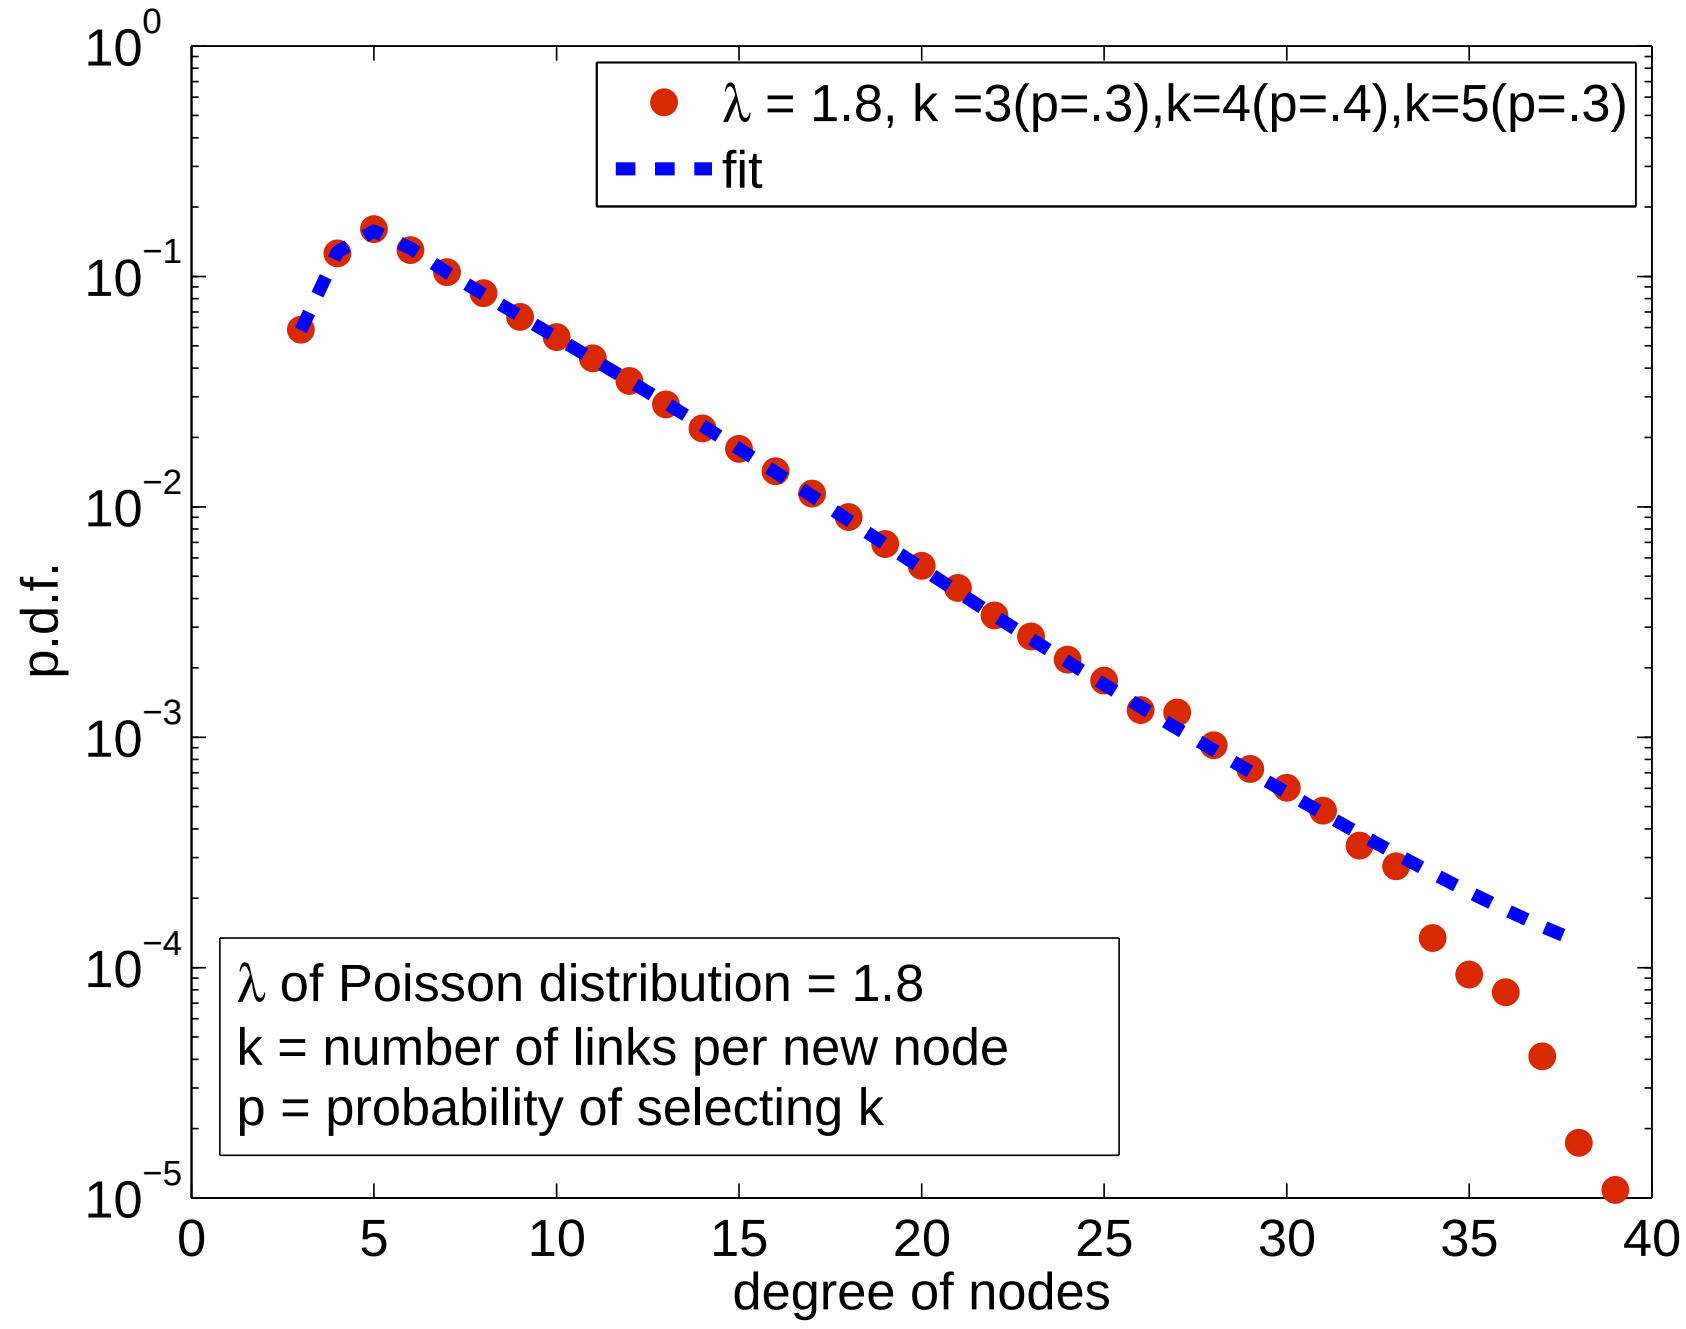

Fig. 6. Fitting a combination of exponential and gamma p.d.f.s to the degree distribution in radius 20 for variable K

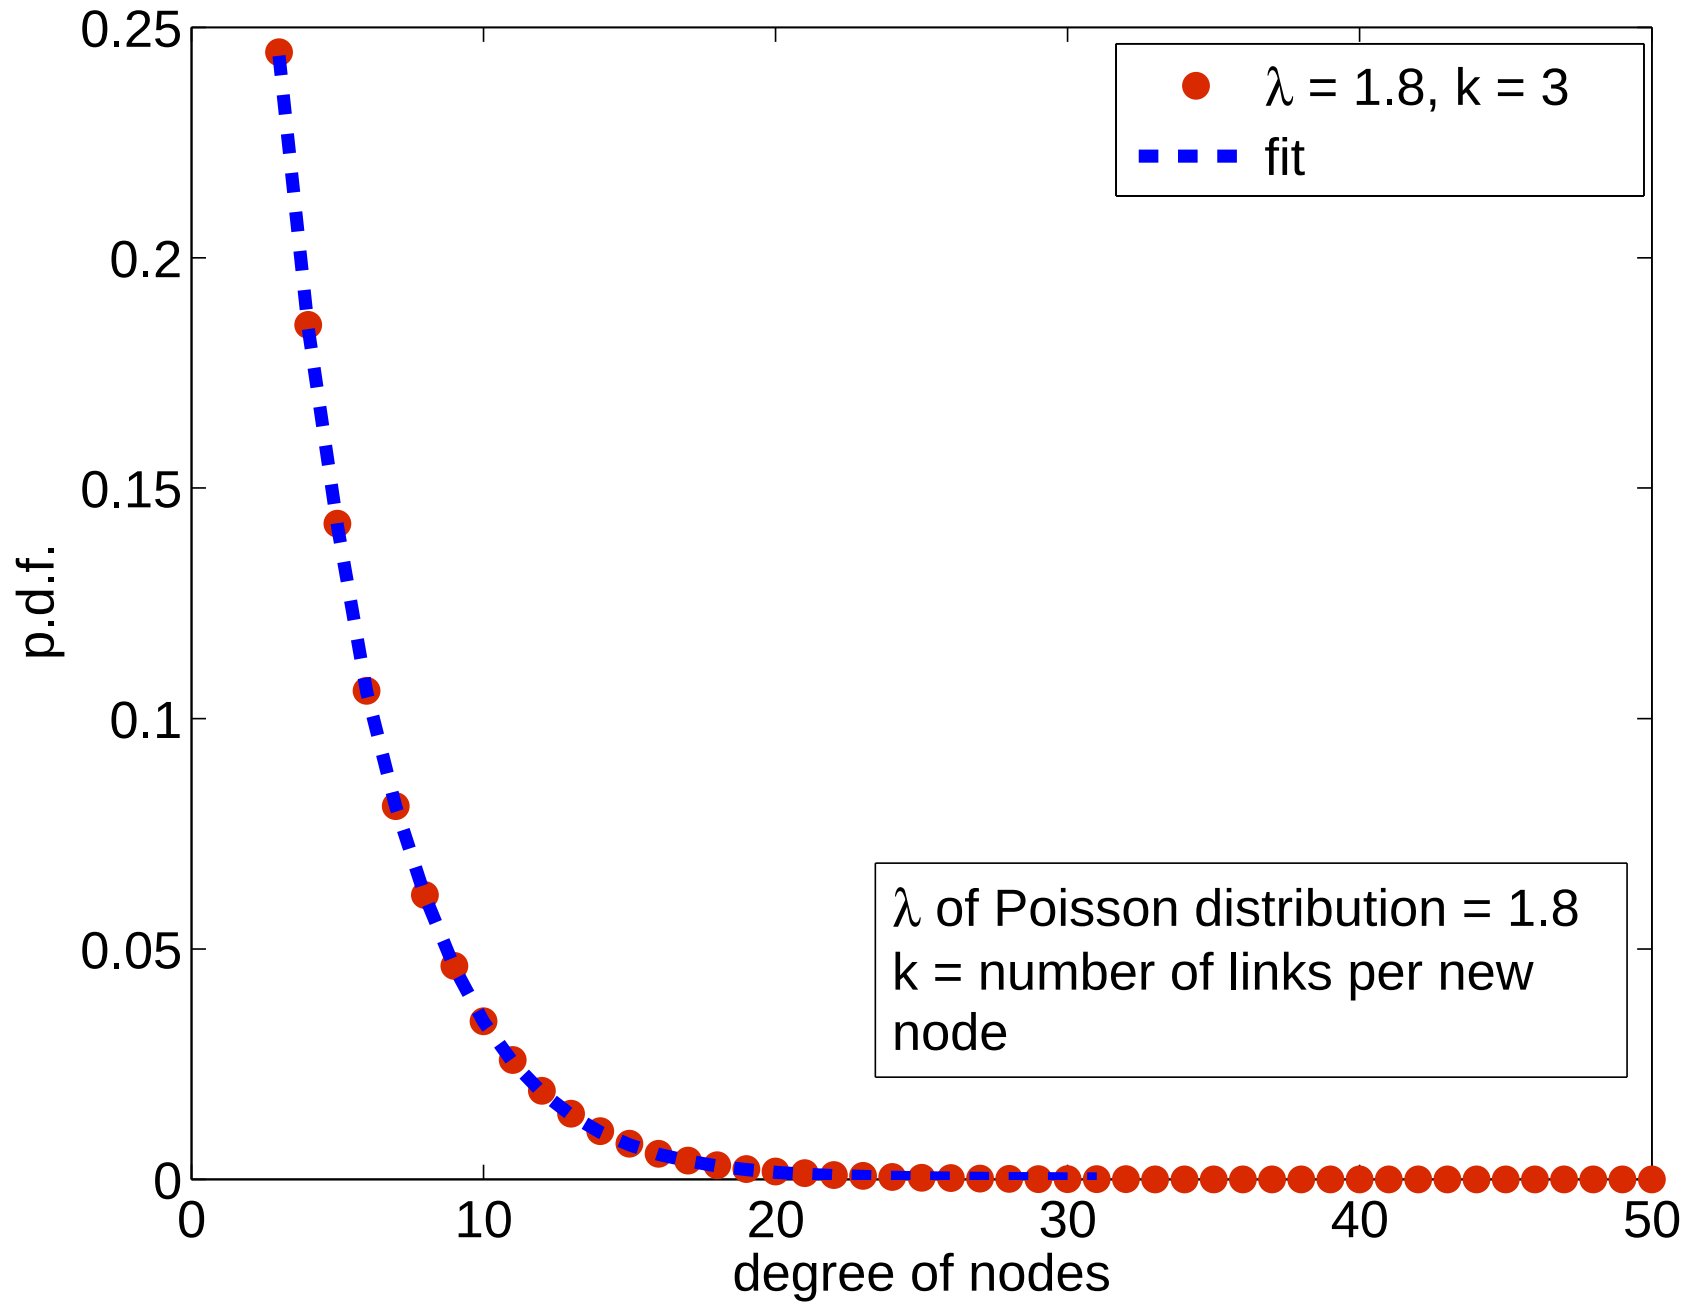

Fig. 7. Fitting a combination of exponential and gamma p.d.f.s to the degree distribution in radius 20 for fixed K

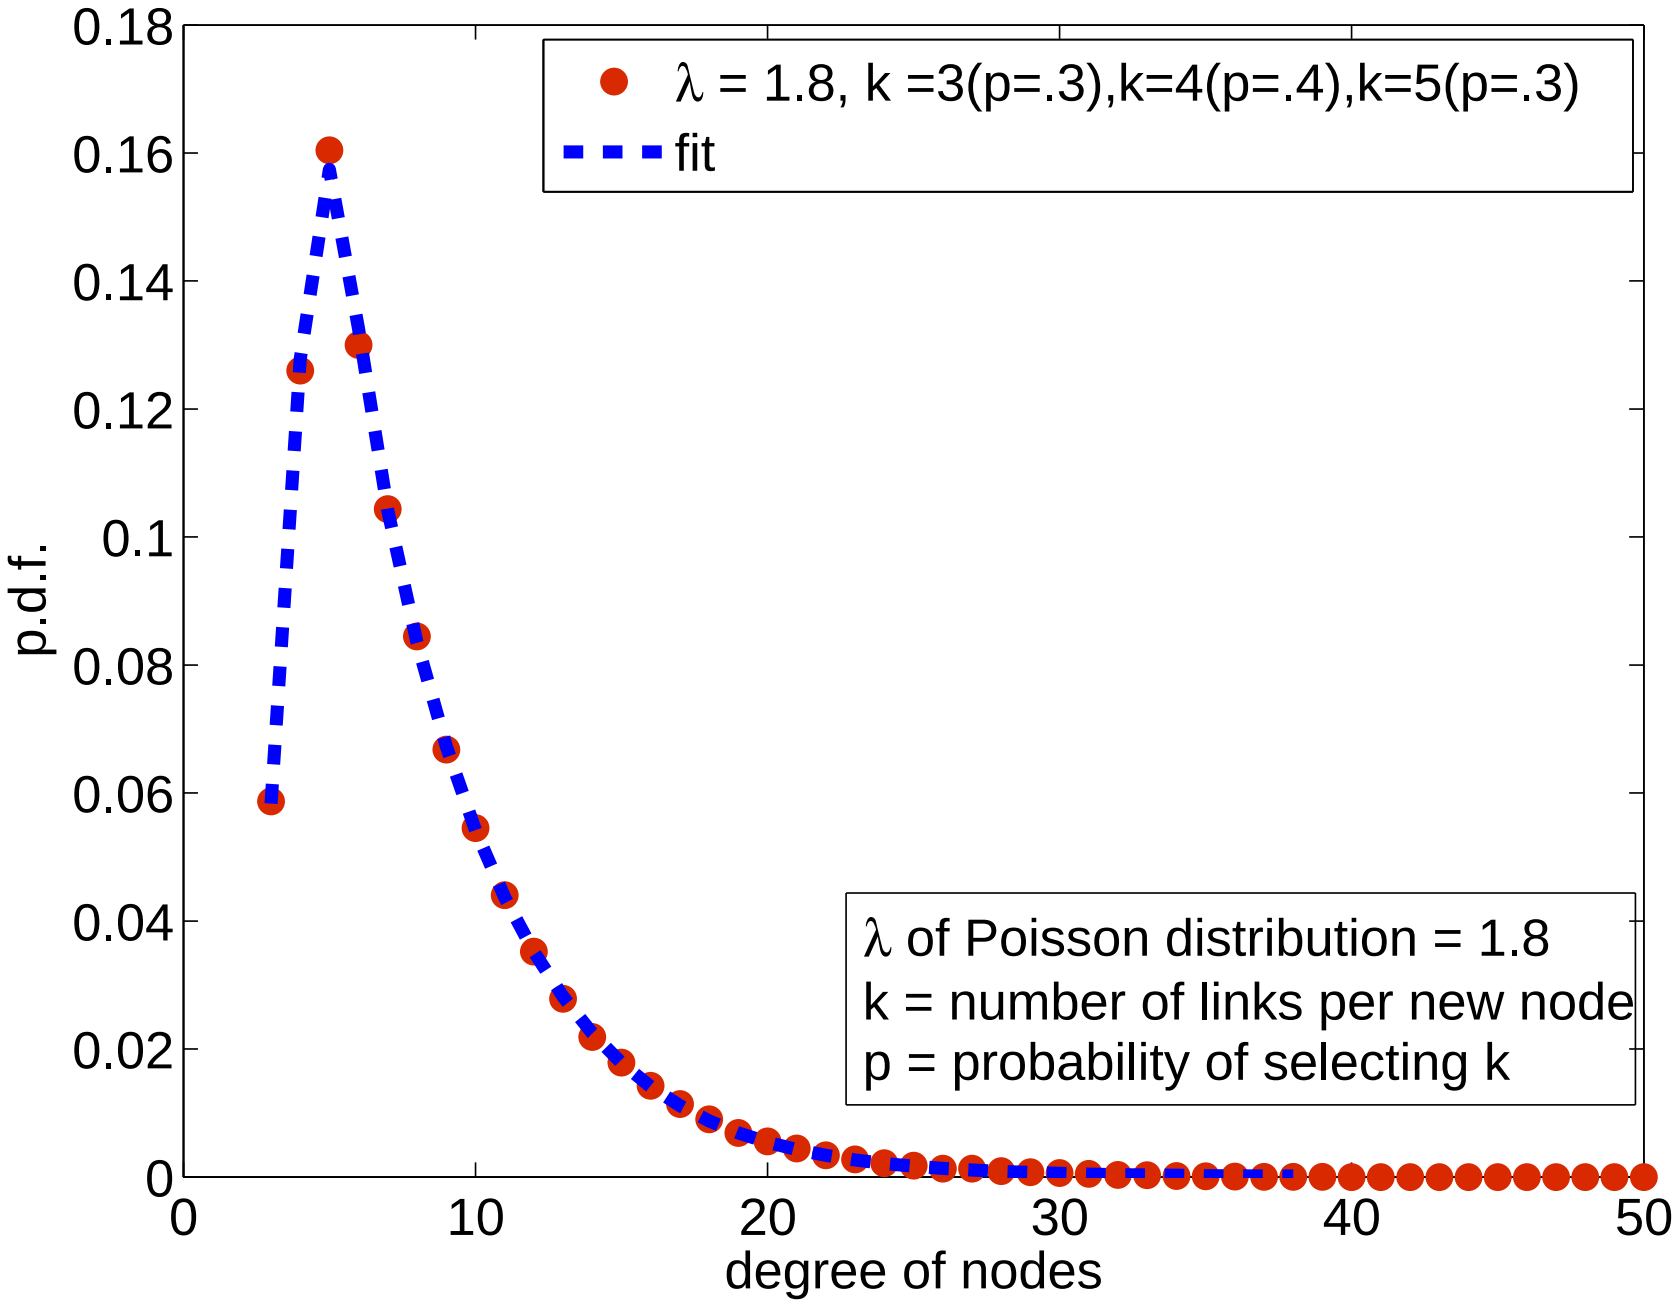

Fig. 8. Fitting a combination of exponential and gamma p.d.f.s to the degree distribution in radius 20 for variable K

We proceed to use another set of fits using the Weibull distribution together with the exponential and gamma distributions as before. Figures 9 and 10 show the improvement in performance by the addition of Weibull distribution to the fitting process. On an average for different cases (fixed and variable K), the addition of the Weibull distribution leads to a decrease in the L-2 norm of the fitting error from 10^{-3} to 10^{-4} while using the same number of combining distributions to model the empirical p.d.f. (around 10). In Figure 9, we show the performance for a fixed value of K and in Figure 10, the p.d.f. is fit for a variable K.

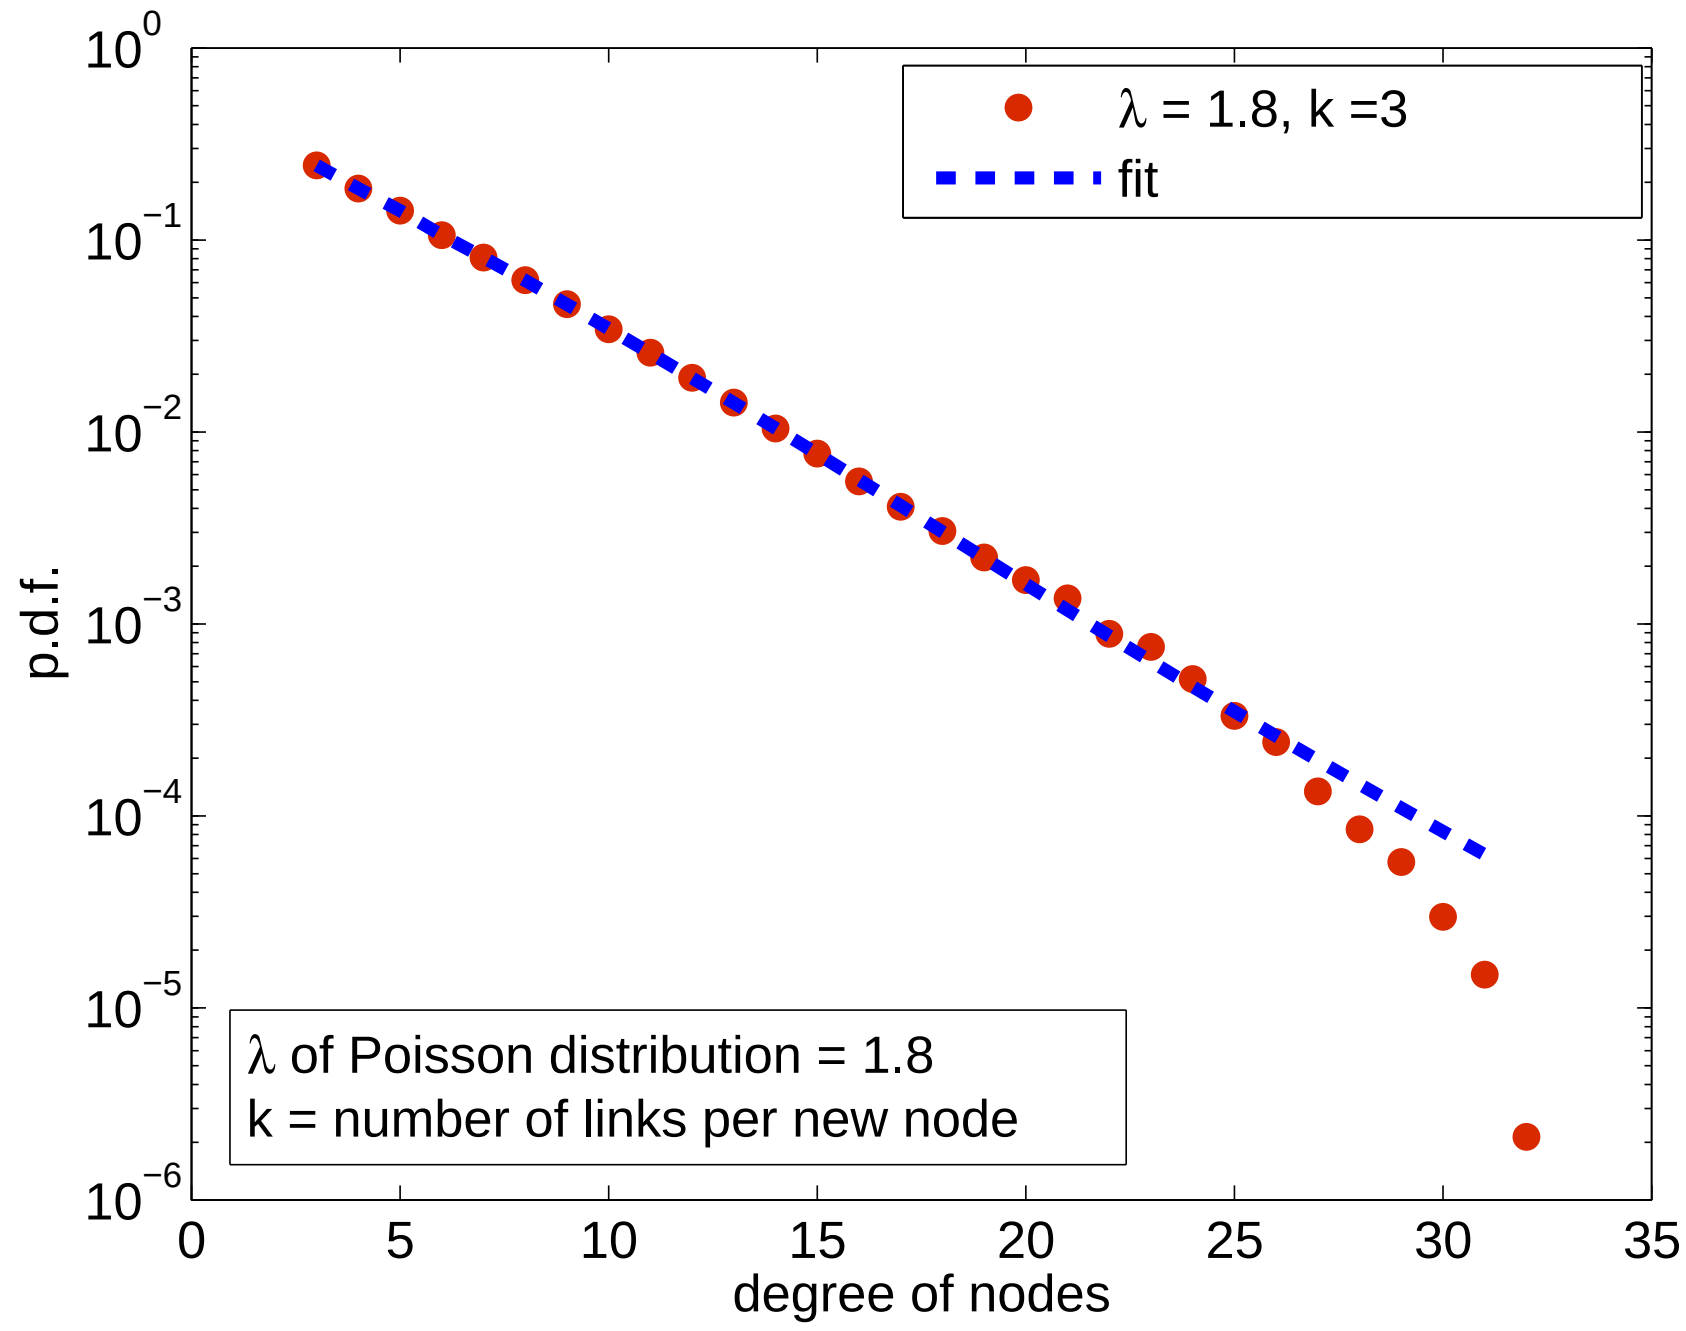

Fig. 9. Fitting a combination of exponential, gamma and Weibull p.d.f.s to the degree distribution in radius 20for fixed K

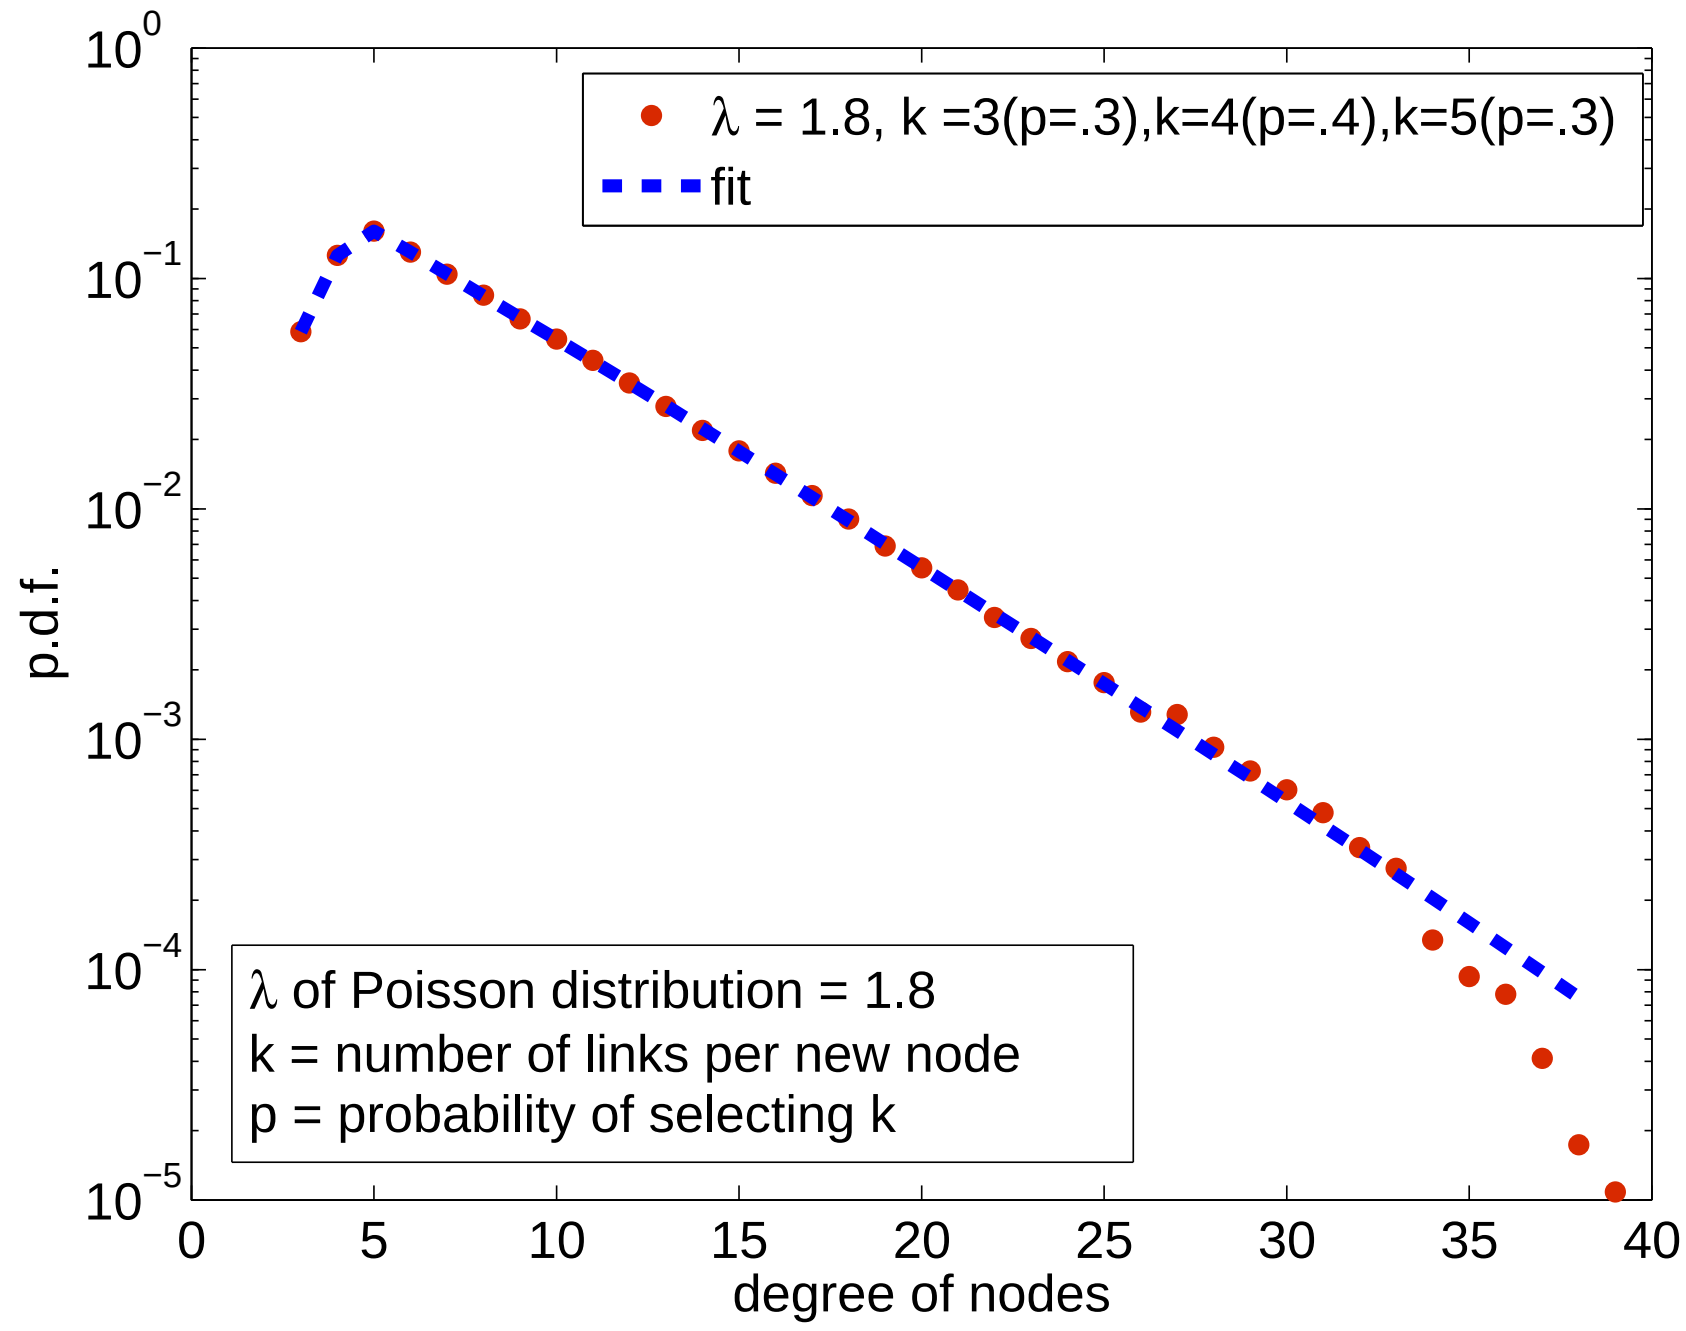

Fig. 10. Fitting a combination of exponential, gamma and Weibull p.d.f.s to the degree distribution in radius 20 for variable K

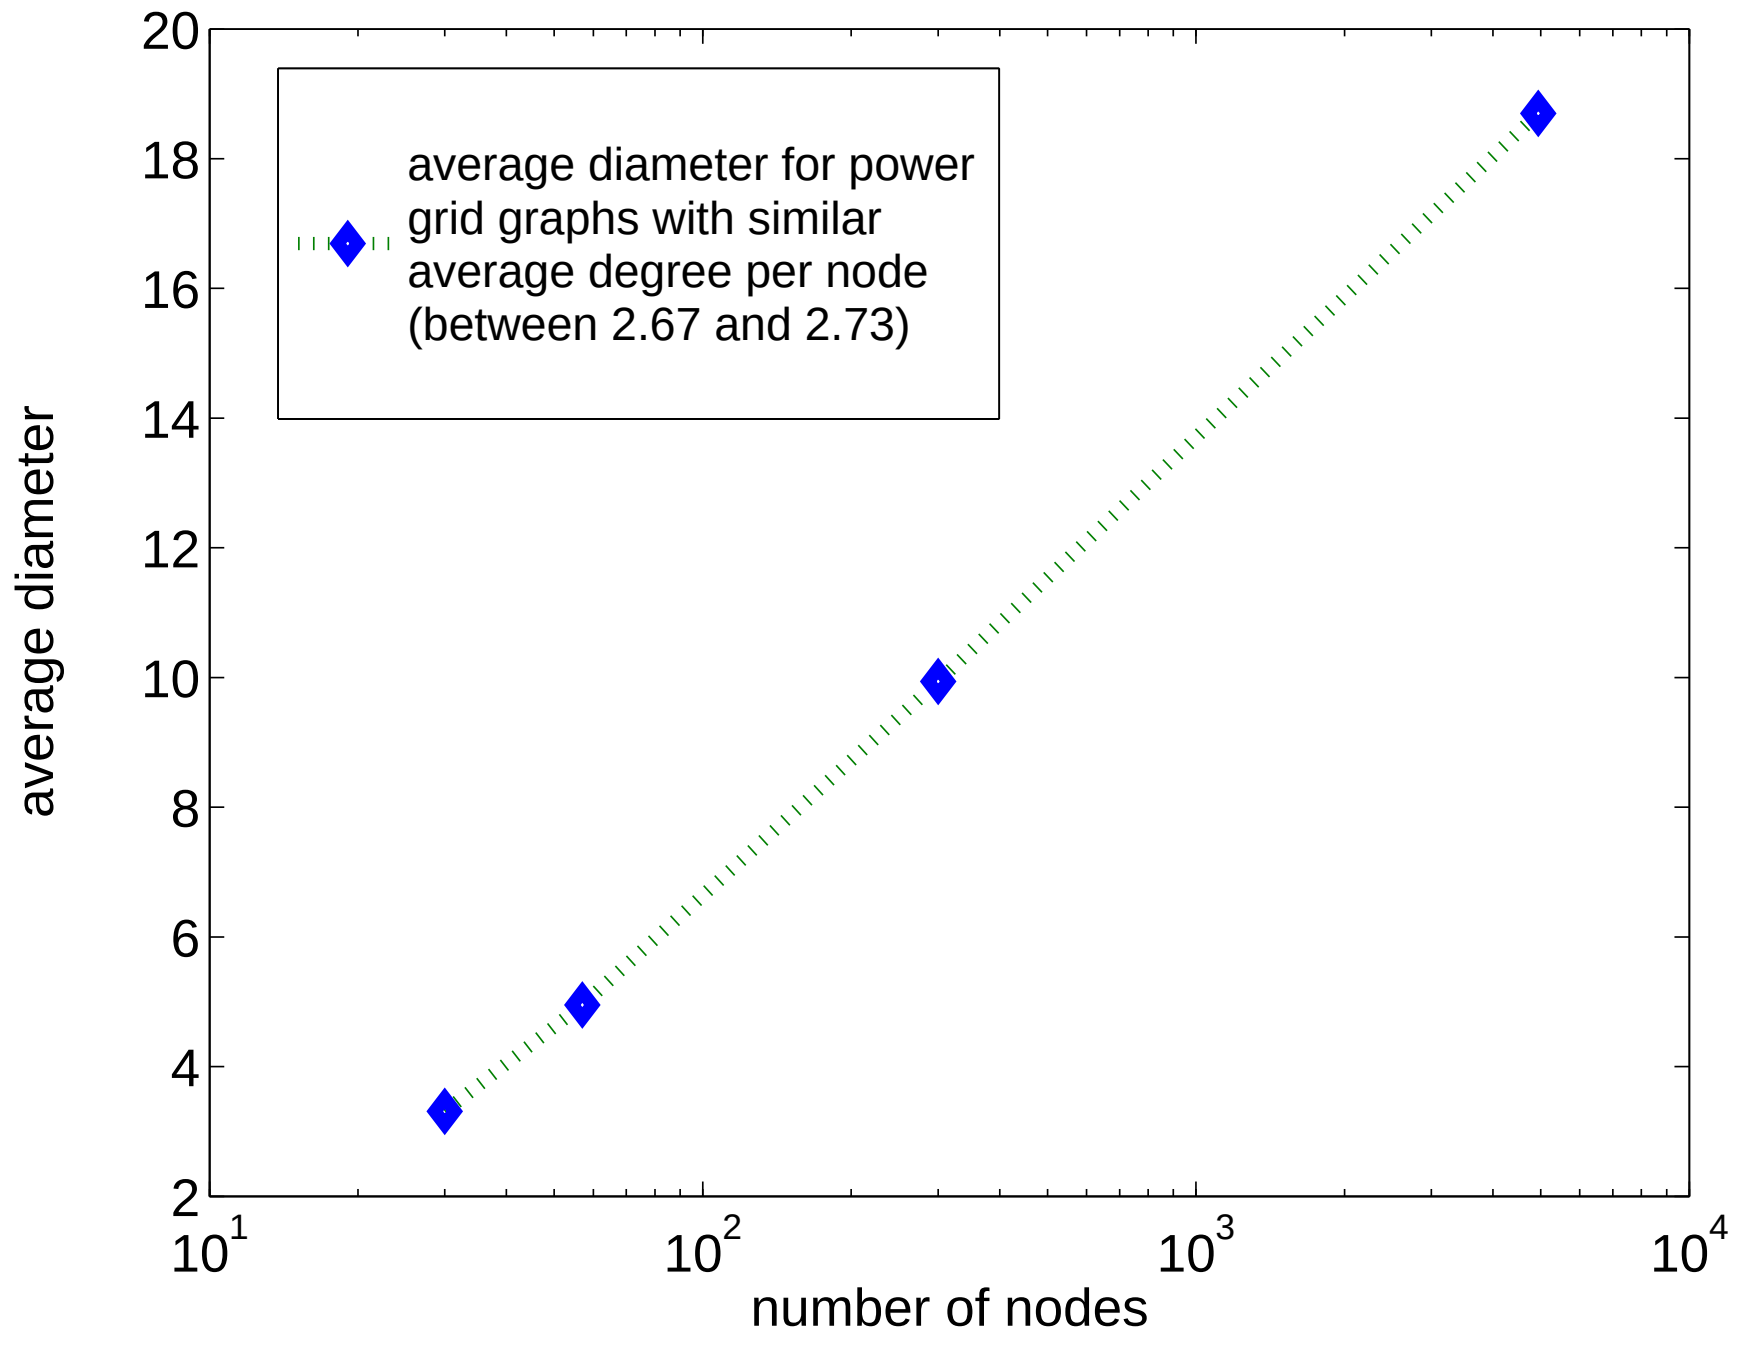

Fig. 11. Diameter of the network v/s size of the power grid network

IV. DIAMETER OF OUR GENERATIVE MODEL

In general, due to different topological constraints, power grids vary in their connectivity parameters and average degree. Thus, the scaling of the diameter of the network graph with the number of nodes is hard to quantify. Using the data given in [15], [16], we compare power grids with similar average nodal degree and observe that the average diameter of the network scales as the logarithm of the network size (number of nodes). Figure 11 illustrates this finding. We carry out diameter analysis of our proposed generation model to find out small world characteristics as mentioned earlier. Simulations are run for different values of N (number of nodes) and K (number of connections per incoming node). The results show a similar scaling between the diameter of the network and the size of the network as found in real networks. This is in accordance with the approximate analysis of diameter for graphs in [18] as shown below. This shows that for an exponential degree distribution, the diameter should scale as the logarithm of the number of nodes in the graph (small world).

A. Approximate analysis of diameter of a graph

Consider a graph with a given degree distribution with p.d.f. $P(d)$ and average degree given by d_{av}. Now the diameter is the maximum number of hops needed to get from any node to any other node in the graph. Assume that the degrees of nodes sharing an edge are independent of each other. Choose a random node A. Then, the degree distribution of a randomly chosen neighbor of A is given by $\frac{P(d)d}{d_{av}}$. Thus, the total number of nodes at a distance of two hops from A through the chosen neighbor is given by $\sum_d (d-1)\frac{P(d)d}{d_{av}}$ or $\frac{<d^2>-d_{av}}{d_{av}}$ and the total number of two hop neighbors of A is given by $d_{av}\frac{<d^2>-d_{av}}{d_{av}}$. Expanding the search for nodes at greater distance from A by considering the ones at a distance of two hops and so on, we find the estimate of the diameter as the number l such that

$$\sum_{j=1}^{l} d_{av}(\frac{< d^2 > -d_{av}}{d_{av}})^{j-1} = N - 1 \tag{11}$$

$$\Rightarrow \; l = \frac{\log[(N-1)(< d^2 > -2d_{av}) + d_{av}^2] - \log[d_{av}^2]}{\log[< d^2 > -d_{av}] - \log[d_{av}]} \tag{12}$$

Here, $d_{av} = 2k$ and $< d^2 >= 5k^2$ where $K = k$ is the minimum number of links formed by each node and is obtained based on an exponential C.D.F. obtained through mean field analysis. This gives

$$l = \frac{\log[(N-1)(5k^2 - 4k) + 4k^2] - \log[4k^2]}{\log[5k^2 - 2k] - \log[2k]}$$

This is verified using Figure 12, for a network developed using our generation model. This highlights the dependence of the diameter on N. We also find a similar dependence on N for the average path lengths between nodes of the simulated network as shown in Figure 13.

To showcase the relationship between K, the minimum number of links per node of the system and the diameter of the network, we present simulation results for our model and observe the decaying behaviour behavior depicted in Figure 14. This is due to the fact that as K increases, more edges/links are formed at each time-slot leading to a decrease in diameter.

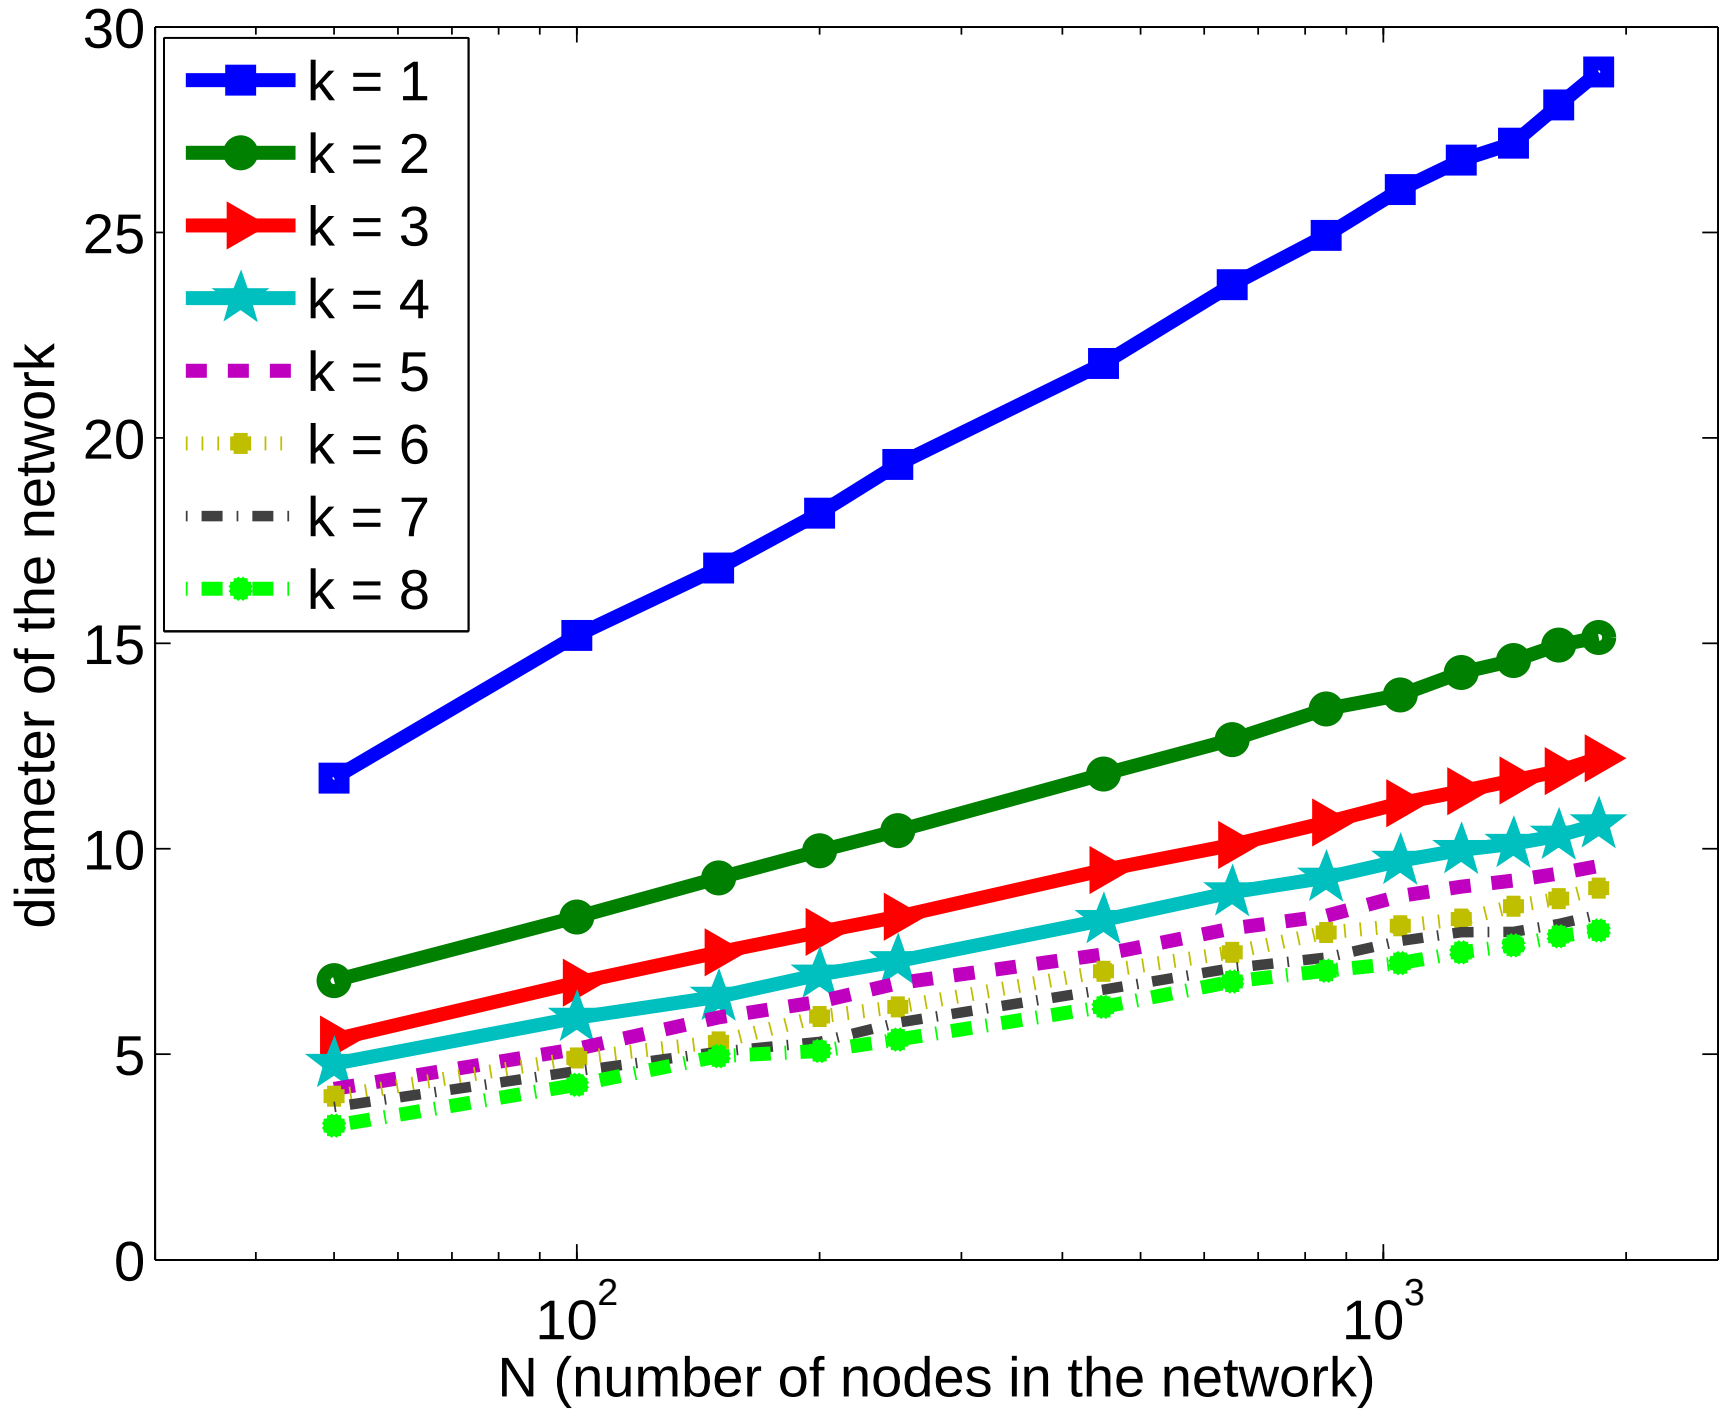

Fig. 12. Diameter of the network v/s size of the network N

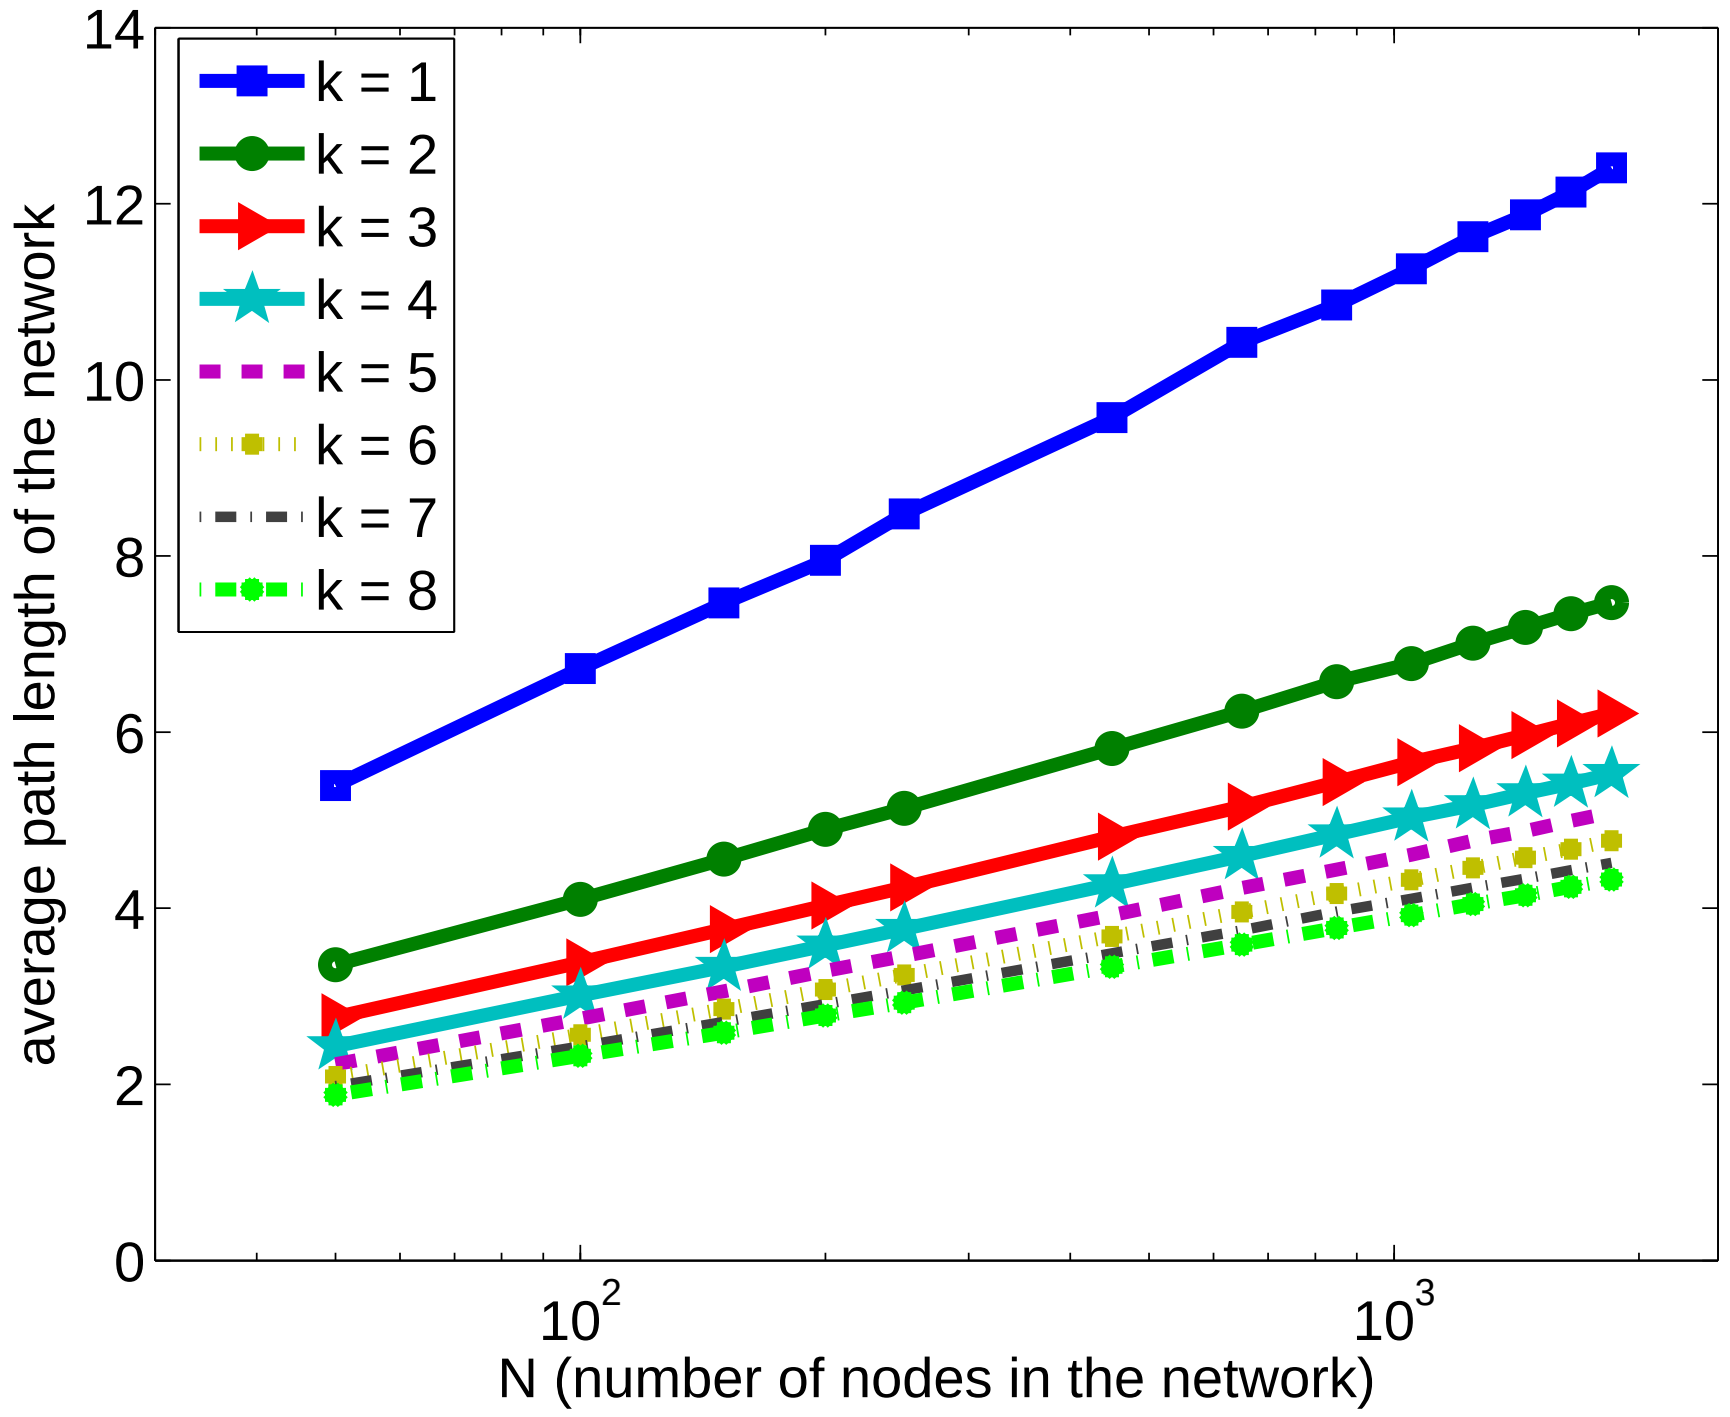

Fig. 13. Average path length of the network v/s size of the network N

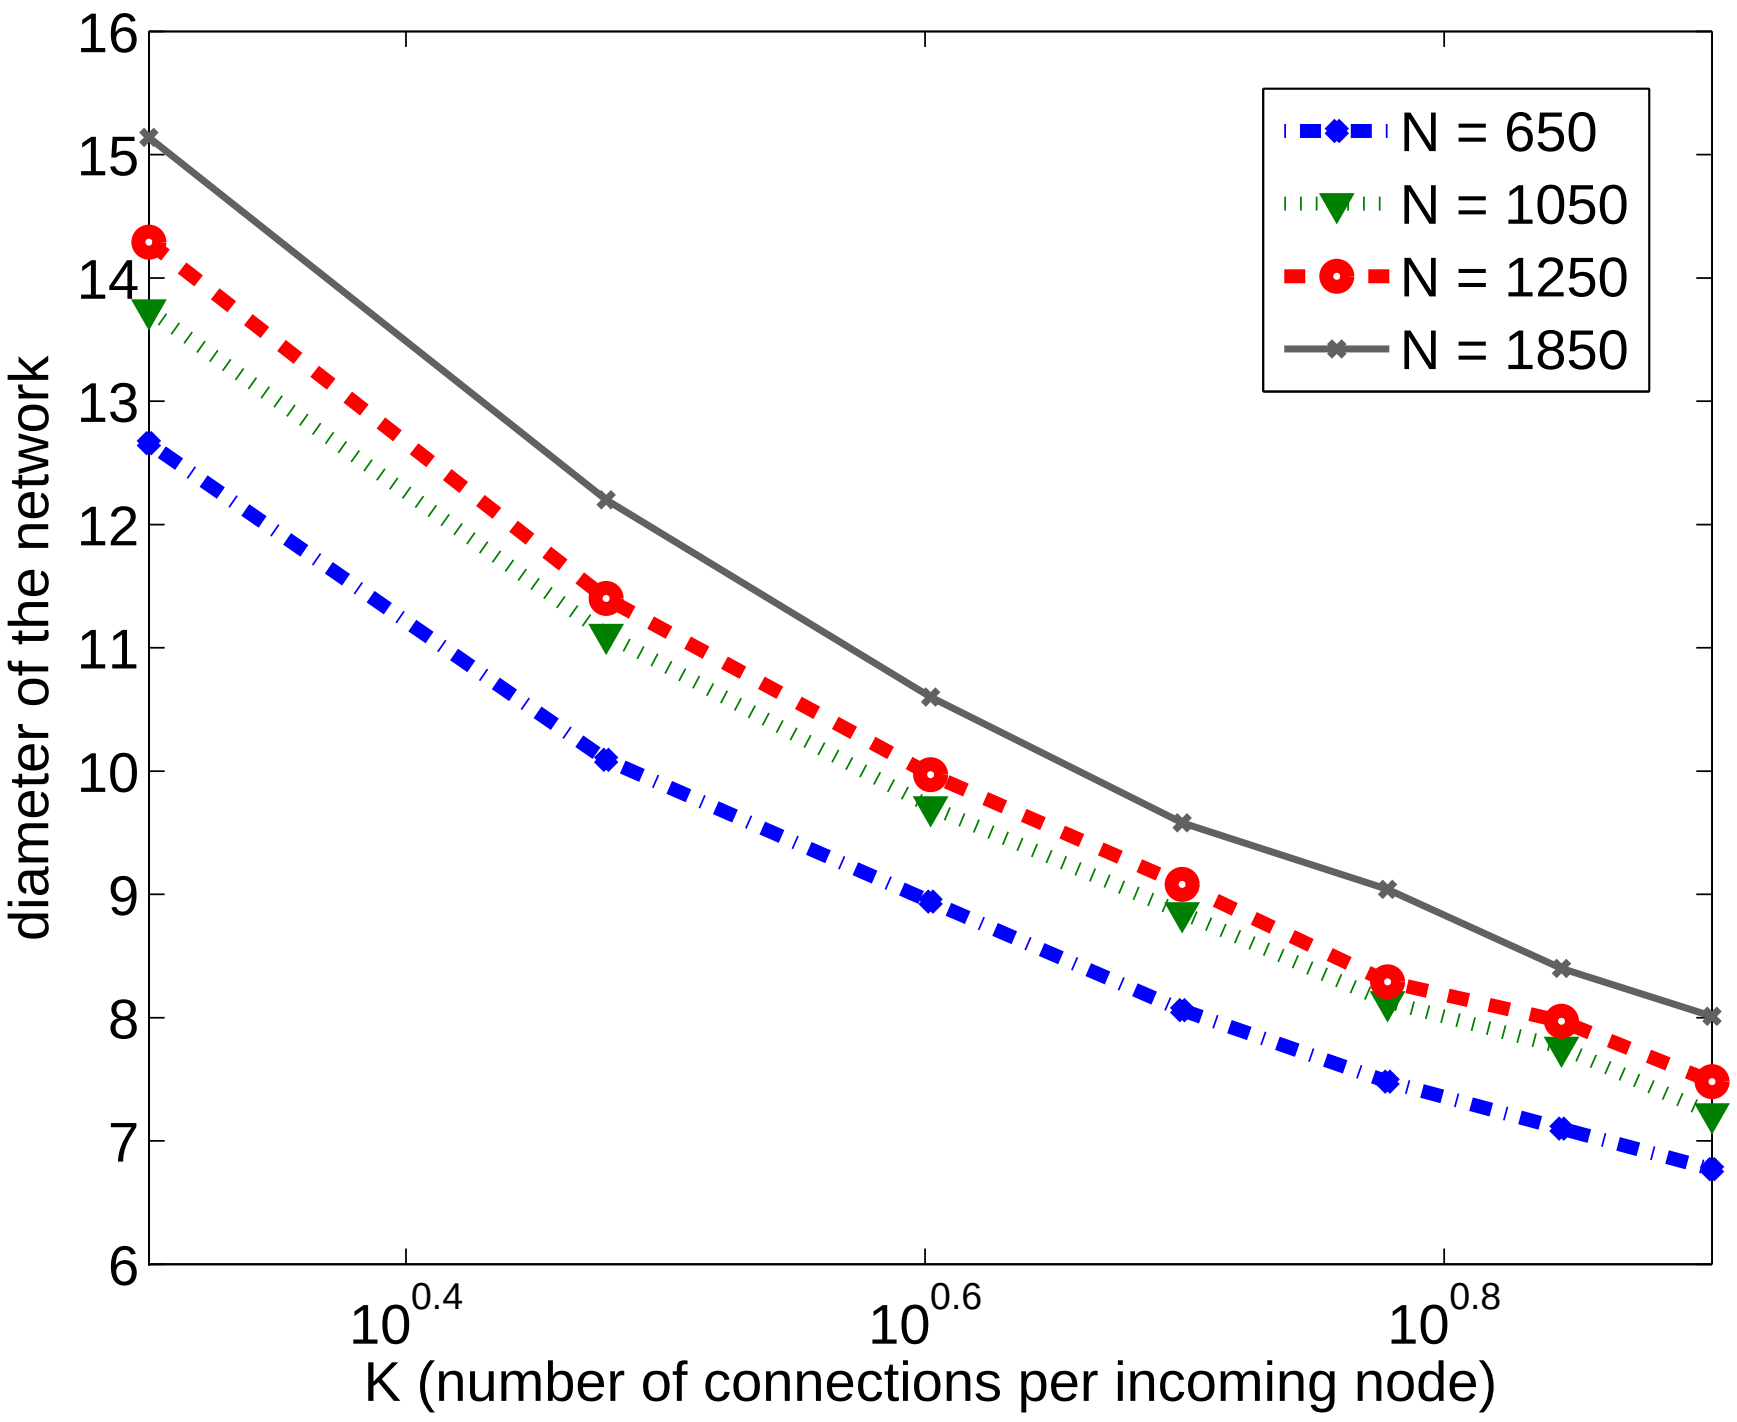

Fig. 14. Diameter of the network v/s K

V. RESULTS AND CONCLUSION

In this paper, we provide a generative model for the network representing power grids. The model generates a graph representation for the power grid where new nodes are assumed to appear randomly at different locations within a given geographical area and form links with K nearest neighbors. We demonstrate the efficacy of the model by analyzing its degree distribution and diameter. The degree distribution of the generative model has a good fit with the exponential degree distribution observed for power grids and reported in literature. We further provide a mean-field analysis of the generative process and show that it gives rise to an exponential degree distribution with the same average degree as observed in simulations of the model. The diameter of the network has implications for the spread of information and vulnerability of the power grid. We measure the diameter of the network given by the generative model and show a logarithmic scaling with the number of nodes. We verify it by comparing it with the approximate analysis of network diameter given in [18]. The scaling is similar to observations in real power grids with comparable average degree of the network. Other topological features of the the power grid include features like 'betweeness', clustering coefficient etc. which need to be studied to better understand the practical viability of our model. This is the focus of our future research in this domain.

REFERENCES

[1] R. Albert, H. Jeong, and A.-L. Barabasi, “Error and attack tolerance of complex networks”, *Nature*, vol. 406, 2000.

[2] P. Erdos and A. Renyi, *On the evolution of random graphs*, Akad. Kiadó, 1960.

[3] L. Garber, “Denial-of-service attacks rip the Internet”, *Computer*, vol. 33, no. 4, Apr 2000.

[4] A.-L. Barabasi and R. Albert, “Emergence of scaling in random networks”, *Science*, vol. 286, 1999.

[5] Z. Wang, A. Scaglione, and R. Thomas, “Generating statistically correct random topologies for testing smart grid communication and control networks”, *IEEE Trans. on Smart Grid*, vol. 1, No. 1, June 2010.

[6] M. Rosas Casals, S. Valverde Castillo and R. V, Solé, “Topological vulnerability of the European power grid under errors and attacks”, *International Journal of Bifurcations and Chaos*, 2007.

[7] P. Crucittia, V. Latorab, and M. Marchioric, “A topological analysis of the Italian electric power grid”, *Physica A*, vol. 338, 2004

[8] R. Solé, M. Rosas-Casals, B. Corominas-Murtra, and S. Valverde, “Robustness of the European power grids under international attack”, *Physics and Society (physics.soc-ph)*, 2007

[9] D. J. Watts, R. Muhamad, D. Medina, and P. Dodds, “Multiscale,resurgent epidemics in a hierarchical metapopulation model”, *Proc. of the National Academies of Science*, 2005.

[10] J. C. Miller and J. M. Hyman, “Effective vaccination strategies for realistic social networks”, *Physica A*, vol. 386, 2007.

[11] D. J.Watts and S. H. Strogatz, “Collective dynamics of ’small-world’ networks”, *Nature*, vol. 393, 1998

[12] R. Albert, I. Albert, and G. L. Nakarado, “Structural vulnerability of the North American power grid”, *Phys. Rev. E*, vol. 69, 2004.

[13] L.A.N. Amaral, A. Scala, M. Barthélémy, and H.E. Stanley, ”Classes of small-world networks”, *Proc. Natl. Acad. Sci.* , vol. 97 2000.

[14] University of washington, power systems test case archive. Available: http://www.ee.washington.edu/research/pstca.

[15] Eduardo Cotilla-Sanchez, Paul D. H. Hines, Clayton Barrows, Seth Blumsack, “Comparing the topological and electrical structure of the North American electric power infrastructure”, *arXiv:1105.0214v2 [physics.soc-ph]*, May 2011.

[16] Z. Wang, A. Scaglione, and R. Thomas, “Generating statistically correct random topologies for testing smart grid communication and control networks”, *IEEE Trans. on Smart Grid*, Vol. 1, No. 1, June 2010.

[17] M. Grant, S. Boyd, “CVX: Matlab software for disciplined convex programming”, http://stanford.edu/∼boyd/cvx, 2009.

[18] M. Jackson, “Social and economic networks”, *Princeton University Press*, 2008.

[19] R. Durrett, “Random graph dynamics”, *Cambridge University Press* , 2006.